



Project
Type
Date
Cat #

Application Features

Premium-grade, surface-mounted vanity light. For use with indoor applications where low-glare, high-quality and ease of installation are required.

Specifications

Optical System

White opal translucent linear prismatic acrylic diffuser provides soft illumination.

Mounting

Mounting holes are provided. Mounts over electrical junction box. Optional decorative joiner bands are available for when units are butted together.

Construction

Die-formed, code gauge steel housing. One piece end caps fasten with single acorn type nut. Spot-welded for rigidity and clean appearance. Diffuser is retained by a grooved formation running the length of the fixture and is held in place on both ends by the end caps.

Finish

White, polyester powder painted housing. High-reflectivity coated reflecting surfaces for improved efficiency.

Electrical

Rotary lampholders ensure positive lamp retention. Sufficient knockouts are provided for connections and through wiring.

Approvals

Approved to CSA and UL standards.

Features

- Available with 1 or 2 lamps (T8 configurations)
- Ribbed, white opal, acrylic wrap-around diffuser

Options & Adders


- Dimmable and Emergency ballast
- Turn switch
- Toggle switch
- Pull chain switch
- Joiner band
- Convenience outlet

Applications


- Bathrooms
- Vanities
- Utility Areas
- Task Lighting
- Under Cabinets

ARCHITECTURAL LIGHTING

Dimensions

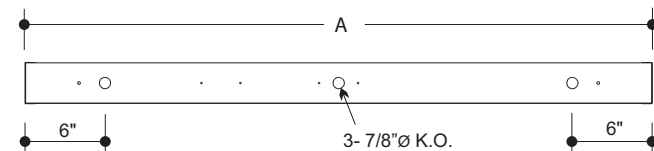


Back View



1 LAMP

Cross Section



2 LAMP

MODEL			
1 LAMP	2 LAMP	NOMINAL LENGTH	A
118	218	18"	18 1/4"
124	224	24"	24 1/4"
136	236	36"	36 1/4"
148	248	48"	48 1/4"

Project
Type
Date
Cat #

AMB Ambassador

Premium-Grade Surface-Mounted Wall Vanity Luminaire



Photometrics - Please consult www.viscor.com for photometric results.

Ordering

AMB [] [] - [] [] [] [] - [] **Options**

Typical Number of lamps in Cross Section

- 1
- 2

Nom. Length (in.)

- 15
- 18
- 24
- 36
- 48

Lamp Watts
See table below

Lamp Type
T8

Voltage
120 - 120V
347 - 347V
UNV - 120-277V
UN4 - 347-480V

Ballast Type
N - Instant Start
P - Program Start
R - Rapid Start

- Ballast Options**
(See Option Code Section For More Information)
- B02 Dimming Addressable Digital (dali)
 - B03 Dimming Low Voltage (0-10v)
 - B04 Dimming Line Voltage
 - B08 Ballast - High Ballast Factor
 - B09 Ballast - Low Ballast Factor

- Packaging Options (select one only)**
- K0 Pack Bulk/ Pallet Packed and/or Wrapped
 - K1 Pack Single

- Mounting Options**
- M15 Mounting Joiner Band

- Switch Options (select one only)**
- S1 Switch Pull-chain
 - S2 Switch Pull-chain 3-way
 - S5 Switch Toggle
 - S6 Switch Turn

- Wiring Options**
- V02 Convenience Outlet

- Approval and Rating Options**
- X7 Dual CSA and USA Markets

Example:

AMB248-T832N120

Lamp Watts

Length	Nominal Lamp Watts T8
15	14
18	15
24	17
36	25
48	32

Other options may be available consult factory.
Specifications and data subject to change without notice.

ARCHITECTURAL LIGHTING