

SAFETY AND INSTALLATION INSTRUCTIONS

Series: LMEZYD-M03

ERP# IIS00259



VISIONEERING

35 Oak St., Toronto, ON M9N 1A1



WARNING: 1. ELECTRICAL SHOCK POTENTIAL !! LUMINAIRE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN. TO PREVENT ELECTRICAL SHOCK, DISCONNECT ELECTRICAL SUPPLY BEFORE INSTALLATION OR SERVICING
2. CONTRACTOR IS RESPONSIBLE FOR ADEQUATELY REINFORCING WALLS AND/OR CEILING TO SUPPORT FIXTURE WEIGHT

CAUTION: This luminaire is designed for permanent installation in ordinary (Non-Hazardous) locations in accordance with the National Electrical Code and all applicable local codes. Do not use in areas of limited ventilation or in high ambient enclosures. The lamp and luminaire operate at high temperature, contact with combustible materials can cause fire and personal contact can cause severe burns.

DRYWALL CEILING MINIMUM OPENING:

Width = 3.25", Length = Fixture Actual Length + 0.187"

| Nominal Length | 2FT | 4FT | 8FT | 12FT |
|-----------------------|---------|---------|---------|----------|
| Actual Fixture Length | 22.375" | 44.375" | 88.625" | 132.875" |
| Opening Length | 22.562 | 44.562 | 88.812 | 133.062 |

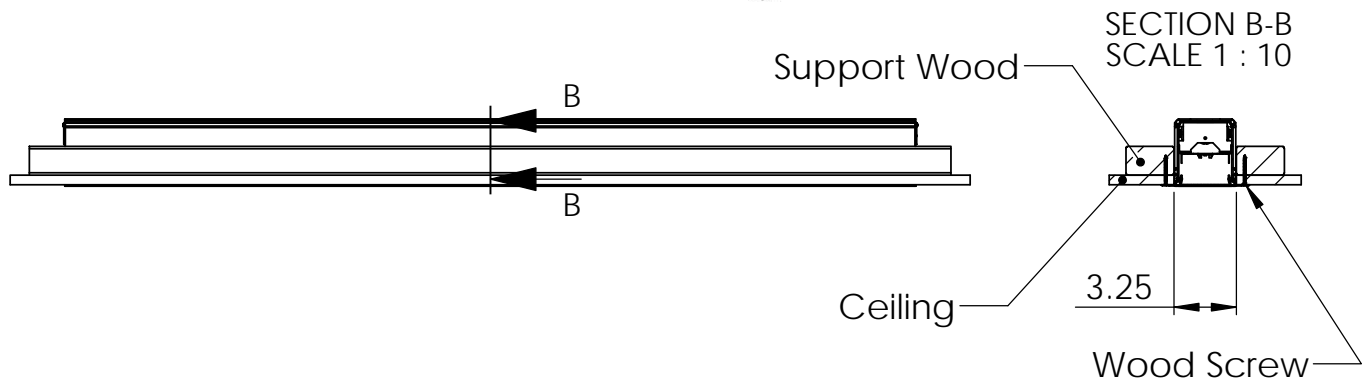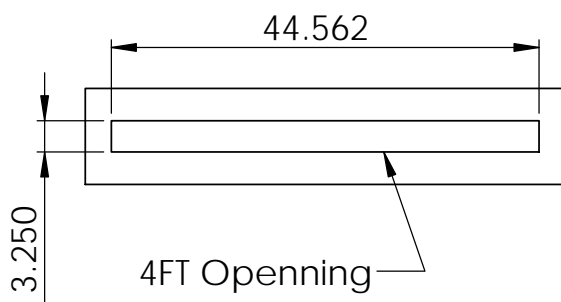

- Step 1: Disconnect power if not new installation.
- Step 2: Cut the ceiling opening as per dimensions above.
- Step 3: Add wood supporting beams beside the opening if needed, and secure them.
- Step 4: Insert fixture into the ceiling / wall opening.
- Step 5: Secure fixture to the ceiling / wall by tightening mounting screws through side flanges.
- Step 6: Remove the Lens and unscrew the LED mounting tray.
- Step 7: Connect fixture to the local power cord, put LED tray and Lens back.
- Step 8: Apply the plaster to fill the surrounding gaps, sand, and paint.
- Step 9: Switch on the power.