

Project	
Type	
Date	
Product Code	
Approved by	

CRS 1X2 - Cleanroom

Surface Mount Overlapping Door 1X2 Cleanroom Luminaire
Suitable for ISO Class 5 - 8 Cleanrooms
LED

Cleanroom

Product Specifications - Application

The CRS1X2 series by Certolux is a specification-grade luminaire for Cleanroom application. The overlapping single piece door design provides for a continuous seal to the sealed housing. The luminaire can be ceiling or wall mounted. Manufactured to IP65 and is available in 1x2 configurations. Completely sealed unit to minimize insect and vermin infiltration. For Hazardous Locations, consult ordering key. NSF/ANSI 2 Food Zone, Splash Zone and Non-Food Zone Applications (see ordering key).



3555

Product Specifications

Housing

Precision formed, TIG welded, one piece 18 gauge cold rolled steel housing. Welded studs are used in order to mount components, offering superior performance over PEM style fasteners.

Mounting

Mounting holes are provided on the back of the housing.

Lens and Lens Retention

The standard lens assembly is made with a tempered safety glass sealed to the lens frame with a non-silicone sealant together with an overlay of a pattern #12 acrylic lens, mechanically secured. Other lens options available. (see product ordering guide)

Finish

The luminaire is in a polyester powder painted white finish.

Door Frame

One piece 60° beveled perimeter door frame, fabricated from 18 gauge, cold rolled steel with TIG welded corners. It is retained by stainless steel aircraft cable when opened. Specialized, military grade, flat head, stainless steel, captive fasteners with integral silicone o-rings easily secure door frame to housing through use of floating cage nuts. Silicone o-rings offer superior performance and longer life over comparable teflon bushings.

Door Frame Gasket

Custom shaped, extruded closed cell silicone gasketing is used throughout to ensure precise, seals between door assembly and housing. Vulcanized corners ensure continuity of the seal on the frame gasket. Continuous retention-mounts mechanically secure and evenly distribute force against both gasketing and diffuser.

Reflector

Painted white reflector is standard, optional VF1 reflectors are available which are made of specular anodized aluminum with a minimum reflectivity of 95% (see product ordering guide).

Approvals


Approved to CSA and UL standards. For use in Hazardous Locations Class I Zone 2, Zone 22. Consult ordering key for HazLoc options and Temperature Codes. NSF Listed (see ordering key).



Electrical

Long life LED's coupled with high efficiency drivers provide quality illumination. Rated to deliver an L80 performance >50,000 hours. The standard driver has a THD of <20%. Standard low-voltage dimming (0-10v, 1%). All electrical components are CSA or UL approved. A 1/2" EMT hole is provided for wiring connections (Surface Mount).

Dimensions

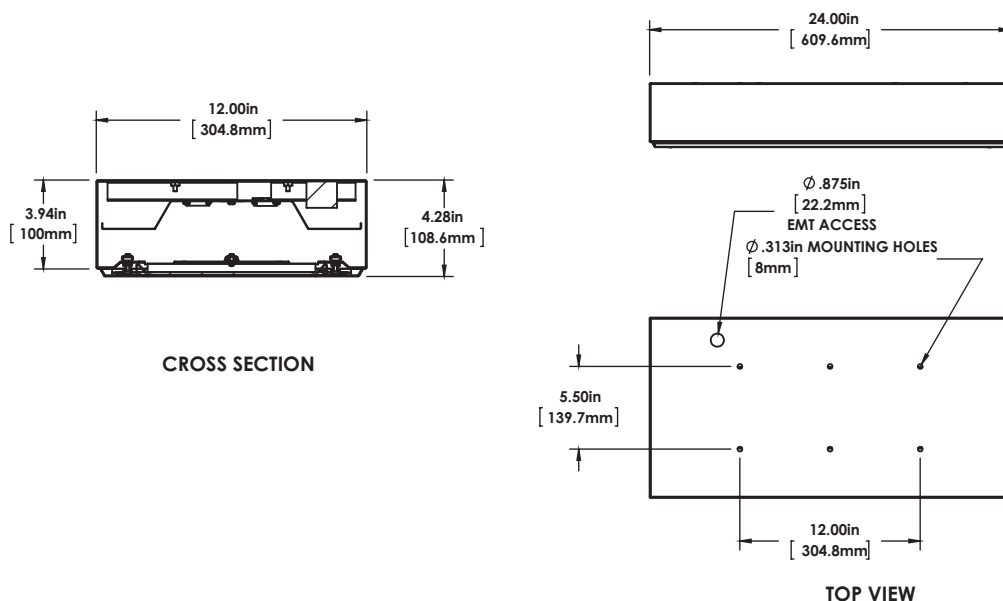

Project	
Type	
Date	
Product Code	
Approved by	

CRS 1X2 - Cleanroom

Surface Mount Overlapping Door 1X2 Cleanroom Luminaire
Suitable for ISO Class 5 - 8 Cleanrooms
LED

Product Specifications - Application

The CRS1X2 series by Certolux is a specification-grade luminaire for Cleanroom application. The overlapping single piece door design provides for a continuous seal to the sealed housing. The luminaire can be ceiling or wall mounted. Manufactured to IP65 and is available in 1x2 configurations. Completely sealed unit to minimize insect and vermin infiltration. For Hazardous Locations, consult ordering key. NSF/ANSI 2 Food Zone, Splash Zone and Non-Food Zone Applications (see ordering key).



3555

Ordering

CRS-3555	1X2	/	-	LED	8					-	
Series	Model	Size (Width x Length)		Light Source	CRI			Voltage			Options
	1x2				8 - (80-89)			UNV - 120-277V 347 - 347V			<p>Driver Options</p> <input type="checkbox"/> B02 Dimming Addressable Digital (DALI) <input type="checkbox"/> B39 Emergency LED Battery Pack
		Door/Housing Gauge			Colour Temp. Deg. K						<p>Packaging Options</p> <input type="checkbox"/> K0 Pack Bulk/Pallet Packed and/or wrapped
		A - 18 Ga. CRS (Painted)* E - 18 Ga. SS #304 (Painted) H - 18 Ga. SS #304 (#4 Brushed) L - 18 Ga. SS #316 (Painted) P - 20 Ga. CRS (Painted)			35K - 3500K 40K - 4000K 50K - 5000K						<p>Mounting Options</p> <input type="checkbox"/> M26(xx) Mounting Stem and Canopy set 3/8 IPS (xx) Specify length
		* Standard Door Frame Material * Standard Housing Material									<input type="checkbox"/> M40 Mounting Safety Lens Tether Stainless Steel <input type="checkbox"/> M56 Tandem Row - Start Fixture <input type="checkbox"/> M57 Tandem Row - Mid Fixture <input type="checkbox"/> M58 Tandem Row - End Fixture
					Lumens						<p>Lens Options</p> <input type="checkbox"/> P56 .125 Clear Acrylic <input type="checkbox"/> P45 .125 Clear Polycarbonate <input type="checkbox"/> P13 .125 Prismatic Acrylic - K12 <input type="checkbox"/> P16 .125 Prismatic Polycarbonate - K12 <input type="checkbox"/> P15 .140 Prismatic High Impact Acrylic - K12 <input type="checkbox"/> P11 .156 Prismatic Acrylic - K19 <input type="checkbox"/> P18 UV Filtering <input type="checkbox"/> P06 Clear Tempered Glass <input type="checkbox"/> P43 .187 Prismatic Polycarbonate - K12 <input type="checkbox"/> P49 .187 Clear Tempered Glass <input type="checkbox"/> P14 Clear Tempered Glass with Prismatic Acrylic Overlay (Std) <input type="checkbox"/> P82 White Translucent Acrylic .080
					026L - 2600lm 035L - 3500lm						<p>Fusing and Breaker Options</p> <input type="checkbox"/> T6 Fuseholder, In-line Single Pole
											<p>Wiring Options</p> <input type="checkbox"/> V25 Radio Frequency Filter <input type="checkbox"/> V39 Night Light - White LED <input type="checkbox"/> V55 Sealed Wire Entry
											<p>Reflector Options</p> <input type="checkbox"/> VF1 Full (95% Reflectance) Specular
											<p>Approvals Options</p> <input type="checkbox"/> X5 NSF (National Sanitation Foundation) <input type="checkbox"/> X8 IP65 Rated <input type="checkbox"/> XH Class I Zone 2 Groups IIC, IIB + H2, IIA Zone 22 Groups IIB, IIA (Class I Div 2 Groups A,B,C,D Class II Div 2 Groups F,G Class III) T3C or T4

Model Numbers relate to specific designs, refer to product photo and Dimension sections for additional details.

Lumen/System Watts

Size	Lumens	System Watts	Temp. Code (XH Only)
1x2	2600	25	T4
	3500	33	

NOTE: Occupancy/Motion Sensors and 1% dimming are not available with Hazardous Location Luminaires (XH Option)

Other options may be available consult factory.
Specifications and data subject to change without notice

