


MEZYF-C52

INSTALLATION INSTRUCTION SHEET




WARNING: ELECTRICAL SHOCK POTENTIAL !! DO NOT ATTEMPT TO INSTALL, MAINTAIN OR RELAMP WITHOUT DIS-CONNECTING ALL POWER, FAILURE TO DISCONNECT POWER CAN RESULT IN ELECTROCUTION, SHOCK OR SEVERE BURNS. ONLY QUALIFIED PERSONNEL TO CONDUCT ELECTRICAL INSTALLATION.

DRYWALL (SHEETROCK) CEILING OR WALL INSTALLATION INSTRUCTION:

DRYWALL (SHEETROCK) CEILING OR WALL OPENING:

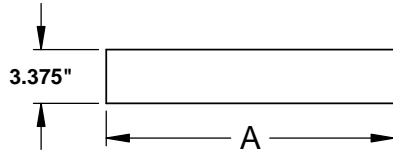

Light source	21WT5 or 39WT5HO	28WT5 or 54WT5HO	21WT5 or 39WT5HO	28WT5 or 54WT5HO	
Nominal unit length	3ft	4ft	6ft	8ft	12ft
Individual unit	34.562"	46.312"	65.750"	89.312"	132.312"
End fixture unit	32.875"	44.687"	64.125"	87.687"	130.687"
Intermediate unit	31.187"	43.000"	62.375"	86.000"	129.000"

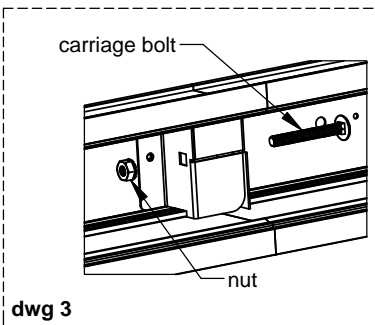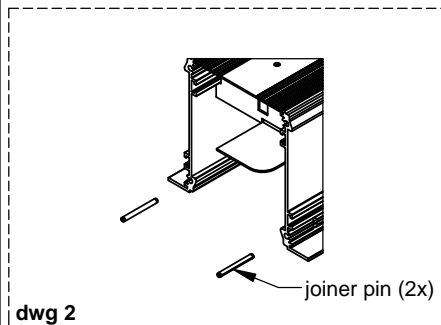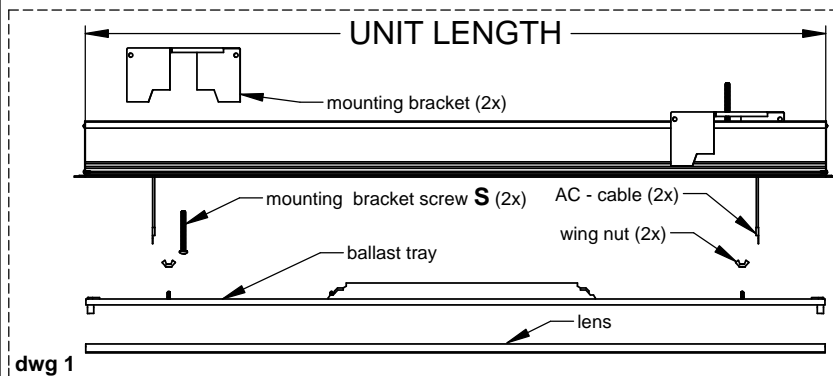

Drywall (sheetrock) ceiling or wall opening length **A** is equal to individual unit or row length plus **0.125"**.

Step 1:
Disconnect power.

Step 2:
Remove lens and ballast tray and detach AC-cable from ballast tray (see dwg1).

Step 3:
Install mounting brackets (2x) with screws **S** (provided).

Step 4:
Bring power through 7/8" KO.

Step 5:
Insert fixture into the ceiling / wall opening (for opening size refer to table provided).

Step 6:
Secure fixture to ceiling / wall by tightening mounting bracket screws **A** (2x) until fixture flange is flush with ceiling / wall.

Step 7:
Insert 2 joiner pins (provided) (see dwg 2). Install next fixture into the ceiling / wall opening and slide onto joiner pins to align fixture housings.

Step 8:
Insert 1/4-20x2.000 carriage bolt and tighten the nut until fixtures are firmly attached (see dwg 3).

Step 9:
Repeat steps until row is complete.

Step 10:
Reinstall ballast tray and make wiring connections according to local electrical cod. Insert proper lamps (supplied by others) and reinstall lens.

- For individual fixture skip steps 7,8 and 9.

T-bar LAY-IN OR FLANGED INSTALLATION INSTRUCTION:

