

| |
|---------|
| Project |
| Type |
| Date |
| Cat # |

Application Features

Commercial-grade, LED modular linear luminaire with direct and indirect illumination. This luminaire features a narrow design and is ideal for architectural applications that require clean and uniform lines.



Specifications

Optical System

Standard top clear diffuser and bottom frosted diffuser are both lay-in lenses.

Mounting

Standard aircraft cable for suspended-mount application (nominal 4 foot suspension).

Construction

Precision-formed steel housing assembly.

Finish

White, polyester powder painted housing.

Electrical

Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver L80 performance > 50,000 hours. Supplied with dimmable drivers (0-10v). Standard 4 foot nominal white, single-circuit. All electrical components are CSA approved or UL listed.

Approvals

Approved to CSA/UL standards. Rated for damp locations.

Warranty

5 year limited warranty. For complete warranty terms visit: http://viscor.com/assets/Viscor_LED_Warranty.pdf

Features

- Frosted Lenses
- 80+ CRI
- Standard low voltage dimming driver (0-10V)

Options & Adders


- Available in direct/indirect and direct configurations
- Emergency Lighting Battery Pack (Remote Mount Only)
- Downlight only option available

Applications

- Office Areas
- Perimeters
- Retail Stores
- Corridors
- Classrooms
- Libraries
- Hospitality

LED
ARCHITECTURAL LIGHTING

Dimensions

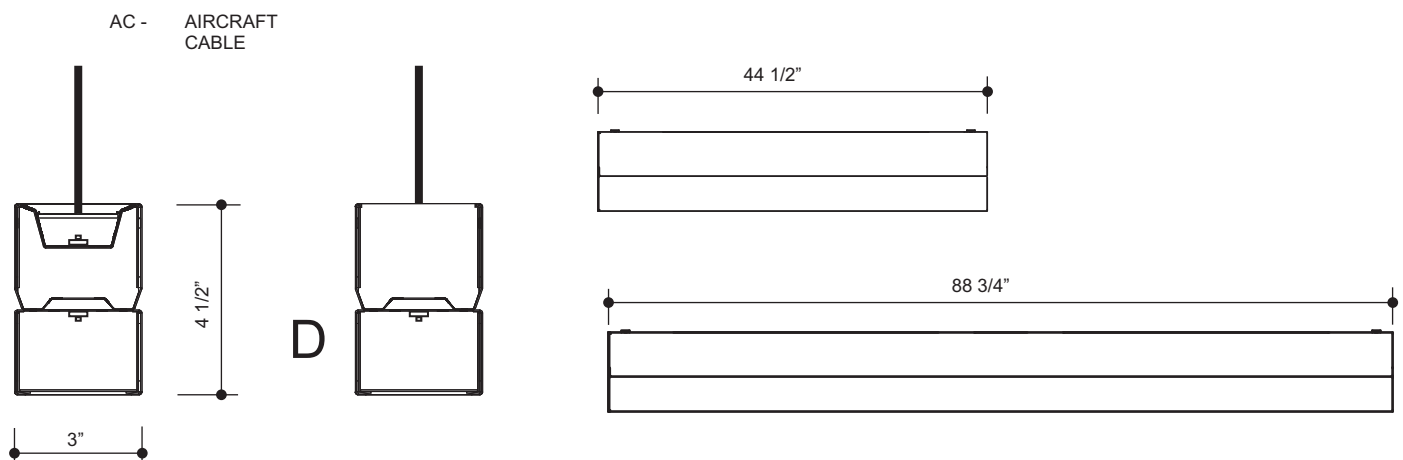

| |
|---------|
| Project |
| Type |
| Date |
| Cat # |


LMEZ-VL LED Mezuzah VL

Commercial-Grade Linear Direct/Indirect Pendant Mount Luminaire



Photometrics - Please consult www.viscor.com for photometric results.

Ordering

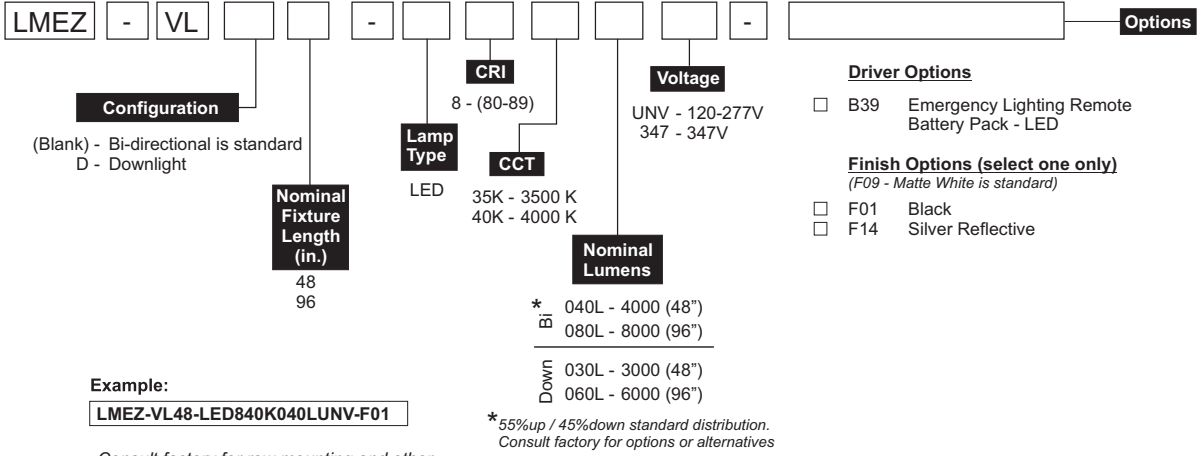

Example:
LMEZ-VL48-LED840K040LUNV-F01

Consult factory for row mounting and other available options. Specifications and data subject to change without notice

| Size | Nominal Lumens | Watts |
|-------|--------------------------|-------|
| 48-in | 030L (Down) 040L (Bi) | 34 |
| 96-in | 060L (Down) 080L (Bi) | 68 |

*55%up / 45%down standard distribution. Consult factory for options or alternatives

LED

ARCHITECTURAL LIGHTING