



Project
Type
Date
Cat #

### Application Features

Specification-grade, LED modular linear lighting luminaire. This luminaire is suitable for surface or aircraft cable mounting.

### Specifications

#### Optical System

Standard diffuser is frosted extruded snap-in acrylic lens.

#### Mounting

Standard aircraft cable for suspended-mount application (nominal 4 foot suspension). Mounting holes are provided for surface-mount applications.

#### Construction

Extruded aluminum housing.

#### Finish

White, polyester powder painted housing.

#### Electrical

Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver L80 performance > 50,000 hours. Supplied with dimmable drivers (0-10v). Standard 4 foot nominal white, single-circuit. All electrical components are CSA approved or UL listed.

#### Approvals

Approved to CSA/UL standards.



#### Warranty

5 year limited warranty. For complete warranty terms visit: [http://viscor.com/assets/Viscor\\_LED\\_Warranty.pdf](http://viscor.com/assets/Viscor_LED_Warranty.pdf)

### Features

- Available in pendant, surface and wall mount configurations
- Frosted extruded acrylic lens
- 80+ CRI
- Standard low voltage dimming (0-10V)

### Options & Adders


- Emergency Lighting Battery Pack (Remote Mount Only)

### Applications

- Office Areas
- Perimeters
- Retail Stores
- Corridors
- Classrooms
- Libraries
- Hospitality

INDUSTRIAL/COMMERCIAL LIGHTING

### Dimensions

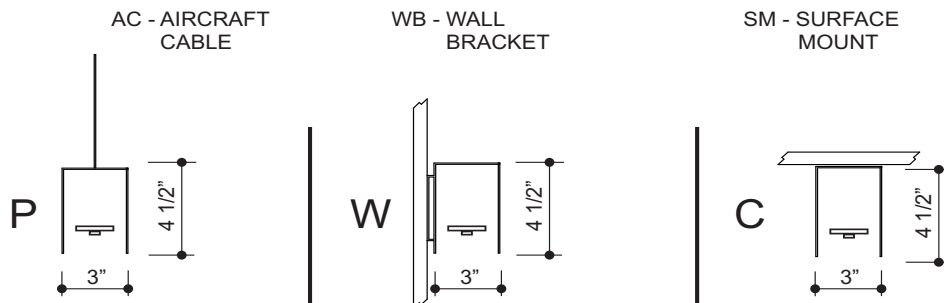

Project
Type
Date
Cat #

# LMEZX

## LED Mezuzah Multi-Function

Specification-Grade Surface/Pendant-Mounted Luminaire



Photometrics - Please consult [www.viscor.com](http://www.viscor.com) for photometric results.

### Ordering

Ordering code structure: **LMEZX** [Mounting] [Nominal Fixture Length (in.)] - [CRI] [Lamp Type] [CCT] [Voltage] [Nominal Lumens] - [Options]

**Mounting:**  
 C - Surface Ceiling  
 P - Pendant/Downlight  
 W - Wall Downlight

**Nominal Fixture Length (in.):**  
 24  
 48  
 96  
 144

**CRI:**  
 8 - (80-89)

**Lamp Type:**  
 LED

**CCT:**  
 35K - 3500 K  
 40K - 4000 K

**Voltage:**  
 UNV - 120-277V  
 347 - 347V\*

**Nominal Lumens:**  
 24" 011L - 1100  
 48" 022L - 2200  
 96" 044L - 4400  
 144" 066L - 6600

**Options:**

**Driver Options**

- B39 Emergency Lighting Remote Battery Pack - LED

**Finish Options (select one only)**  
*(F09 - Easy White is standard)*

- F01 Black
- F14 Silver Reflective

**Configuration**

- M02 Beginning of Row (1 End)
- M03 Standalone (2 Ends)
- M05 Middle Section (No Ends)

**Example:**  
**LMEZXC48-LED840K022LUNV-M03**

\* Other options may be available consult factory.  
 Specifications and data subject to change without notice

Size	Nominal Lumens	Watts
24-in	011L	26
48-in	022L	44
96-in	044L	88
144-in	066L	132

INDUSTRIAL/COMMERCIAL LIGHTING