

Project:	Catalog #:	Type:
Notes:		

Product Description

The Certolux VRD downlights provide durable illumination and protection against physical abuse. Our rigid, specification grade downlights are engineered to withstand high abuse and tampering using a rugged construction and guarantee unbreakable lensing choices without looking institutional. These highly capable downlights are tested to IK10, the highest IK impact level. They are also certified for clean ability to NSF2 and carry a certified IP65 seal, and antimicrobial finishes.

Applications

Public Parks, Day Rooms, Entryways, Vestibules, Canopies

Features

- Designed for use with metal security ceilings and other hard ceilings.
- Delivered lumens: 1000 - 4,000 lm
- Rigid die cast trim
- Tamper Resistant Torx Screws
- IK10 Impact Rated
- NSF2 Splash Zone Certified
- IP65 rated sealed optical chamber
- Antimicrobial finished trims
- Optional low voltage controller

Install Frame

18 Ga Rigid Steel Frame supported by two universal style vertically adjustable brackets. Frame supports a large junction box with (5) 1/2-inch trade size knockouts. Plaster ring attachment provides for adjustment after installation from below the ceiling.

Optical Assembly

The assembly is factory sealed to maintain a clean appearance. The heat sink, reflector, lens, and trim are sealed with long-life EPDM closed cell gasket materials. Supported by tamper resistant Torx screws to a vertically adjustable collar (plaster flange) that allows up to 2.5" thick ceilings.

Lens

Standard lens; Clear, flat, 0.125" thick high impact polycarbonate sealed into the trim assembly secured by a die-cast ring and trim providing continuous compression to lens, reflector and gaskets. Smooth external surface for easy cleaning. See options for thicker choices of polycarbonate lens.

Gaskets

Die cut closed cell EPDM foam gaskets seal lens to the trim and reflector.

LED

Factory sealed COB style LED light engine that is field replaceable and serviceable from below. COB LEDs are high efficiency and closely regulated to maintain CRI, color consistency, lumen performance, and efficacy. Choose from 2700K, 3000K, 3500K, 4000K, and 5000K color temperatures with a color consistency of 3 SDCM, standard 80 CRI, optional 90 CRI. Lifetime L70 is greater than 60,000 hrs. Modules are field replaceable and commercially available. Tunable White options are also available. Tunable White CCT range is 2700-6500K.

Electrical

The standard electronic driver is constant current, programmable and dimmable to 1% using a 0-10V protocol. High efficiency (>85%) and low THD (<10%). Certified to FCC Part 15, Class A. 120-277Vac or 347Vac, 50/60hz. See "Options" for DALI driver choices.

Trim Finish

5 Stage pretreatment and antimicrobial gloss white polyester powder coated. Antimicrobial matte white polyester powder coating is optional*. See "Finish Options".

Installation

Recessed Non-IC- Marked Spacings for metal security and F type (hard) ceilings. Plaster Ring has vertical adjustment for ceilings from 1/2"-2.5" thick. Four (4) Torx™ with center pin tamper resistant fasteners. Use under a covered structural ceiling.

Listings, Certifications and Ratings

ETL listed for recessed type Non-IC Marked Spacings, Wet locations. Ingress protection rated IP65 (Flush lens).


Warranty

5 year limited warranty. For complete warranty, click here:




Approvals

- UL listed to CSA and UL standards for insulated ceilings
- Certified IP65 & Certified NSF
- IK10+ Certified

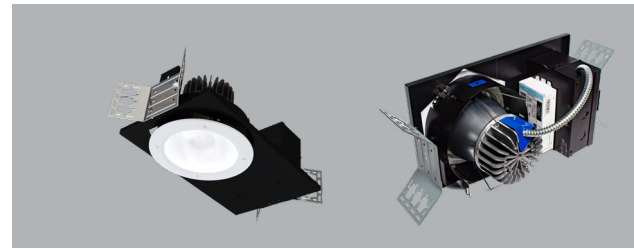


Dimensions

End View

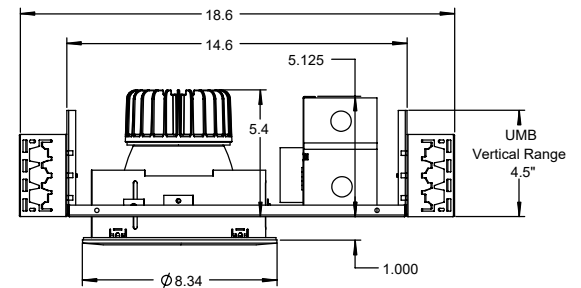


Side View



Project:	Catalog #:	Type:
Notes:		

Order Key

EXAMPLE: VRD6-FSS-SS-WD-840KUNV

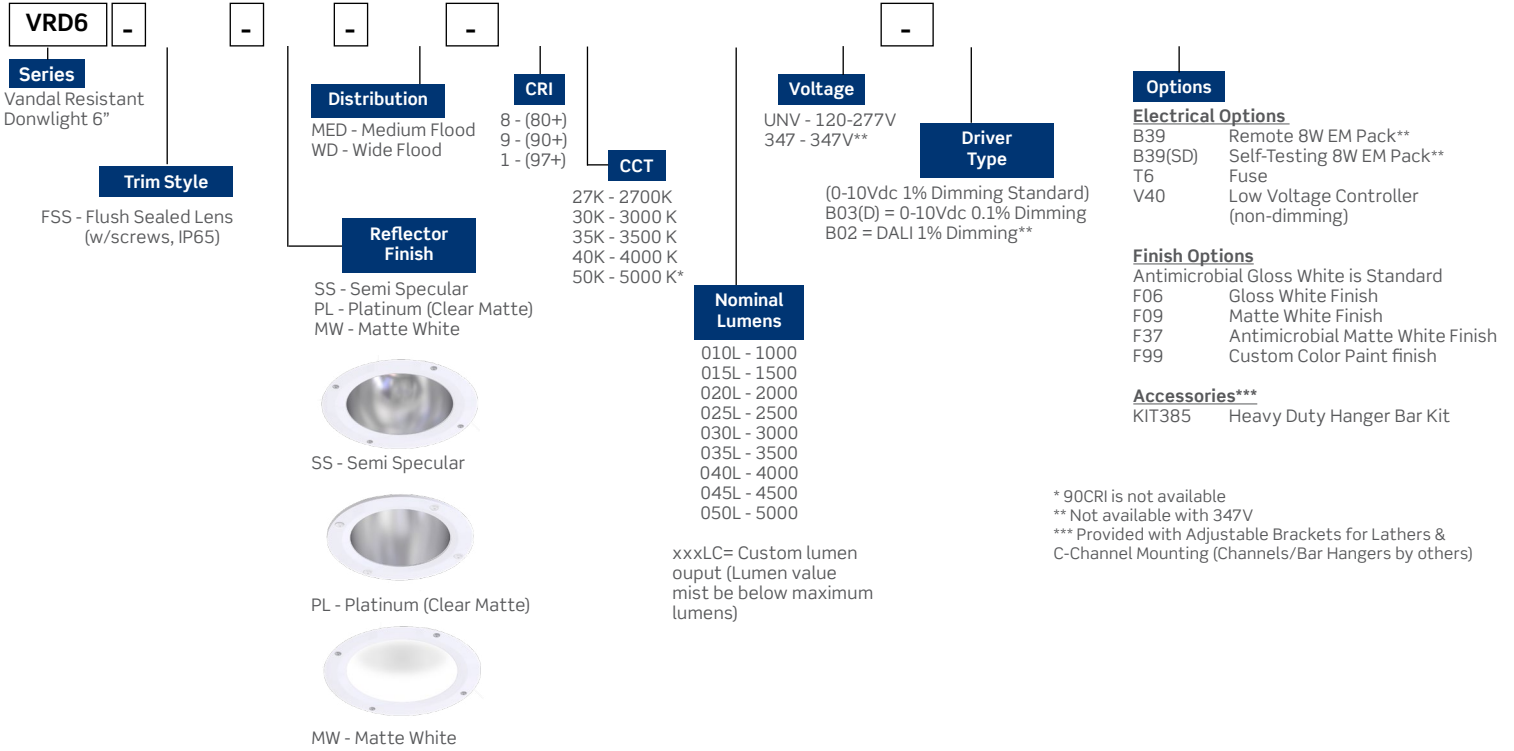

Performance Scaling

CRI	CCT	Lumen Multiplier
80	2700K	0.91
	3000K	0.92
	3500K	0.98
	4000K	1.00
	5000K	1.02
90	3000K	0.84
	3500K	0.79
	4000K	0.82
98	3500K	0.75
	4000K	0.79


Project:	Catalog #:	Type:
Notes:		

LED Performance Data - 6" FLS (Flush Sealed Lens)															
Distribution Order Code	Reflector Order Code	Lumens Order Code	Delivered Lumens 2700K	Delivered Lumens 3000K	Delivered Lumens 3000K	Delivered Lumens 3500K	Delivered Lumens 3500K	Delivered Lumens 4000K	Delivered Lumens 4000K	Delivered Lumens 5000K	Delivered Lumens 3500K	Delivered Lumens 4000K	Estimated L80 LED Life (hrs)	Supply Watts	Efficacy Range
			80 CRI	80 CRI	90 CRI	80 CRI	90 CRI	80 CRI	90 CRI	80 CRI	90 CRI	80 CRI			
MED - Medium	SS	010L	853	858	784	916	742	937	765	952	698	737	>90Khrs	10.2	68.4 - 93.3
		015L	1279	1288	1177	1375	1113	1406	1147	1428	1047	1105	>90Khrs	15.4	68.0 - 92.7
		020L	1706	1717	1569	1833	1484	1874	1529	1904	1396	1473	>90Khrs	20.5	68.1 - 92.9
		025L	2132	2146	1961	2291	1855	2343	1912	2380	1745	1841	>80Khrs	25.6	68.2 - 93.0
		030L	2558	2575	2353	2749	2227	2811	2294	2856	2094	2210	>80Khrs	30.8	68.0 - 92.7
		035L	2985	3004	2745	3208	2598	3280	2676	3332	2443	2578	>80Khrs	35.9	68.1 - 92.8
		040L	3411	3434	3137	3666	2969	3748	3059	3808	2793	2946	>80Khrs	41.3	67.6 - 92.2
		045L	3837	3863	3530	4124	3340	4217	3441	4284	3142	3315	>70Khrs	46.2	68.0 - 92.7
		050L	4264	4292	3922	4582	3711	4685	3823	4760	3491	3683	>70Khrs	51.3	68.0 - 92.8
W - Wide	SS	010L	824	829	757	885	717	905	738	919	674	711	>90Khrs	10.2	66.1 - 90.1
		015L	1235	1243	1136	1328	1075	1357	1108	1379	1011	1067	>90Khrs	15.4	65.7 - 89.6
		020L	1647	1658	1515	1770	1433	1810	1477	1839	1348	1423	>90Khrs	20.5	65.8 - 89.7
		025L	2059	2072	1894	2213	1792	2262	1846	2299	1686	1778	>80Khrs	25.6	65.8 - 89.8
		030L	2471	2487	2272	2655	2150	2715	2215	2758	2023	2134	>80Khrs	30.8	65.7 - 89.6
		035L	2882	2901	2651	3098	2509	3167	2585	3218	2360	2490	>80Khrs	35.9	65.7 - 89.6
		040L	3294	3316	3030	3540	2867	3620	2954	3678	2697	2845	>80Khrs	41.3	65.3 - 89.1
		045L	3706	3730	3409	3983	3225	4072	3323	4138	3034	3201	>70Khrs	46.2	65.7 - 89.6
		050L	4118	4145	3787	4425	3584	4525	3692	4597	3371	3557	>70Khrs	51.3	65.7 - 89.6
	PL	010L	926	932	852	995	806	1018	830	1034	758	800	>90Khrs	10.2	74.3 - 101.4
		015L	1389	1398	1278	1493	1209	1526	1246	1551	1137	1200	>90Khrs	15.4	73.8 - 100.7
		020L	1852	1864	1703	1990	1612	2035	1661	2068	1516	1600	>90Khrs	20.5	74.0 - 100.9
		025L	2315	2330	2129	2488	2015	2544	2076	2585	1895	2000	>80Khrs	25.6	74.0 - 101.0
		030L	2778	2796	2555	2986	2418	3053	2491	3102	2274	2400	>80Khrs	30.8	73.8 - 100.7
		035L	3241	3262	2981	3483	2821	3562	2906	3619	2653	2799	>80Khrs	35.9	73.9 - 100.8
		040L	3704	3729	3407	3981	3224	4070	3321	4136	3032	3199	>80Khrs	41.3	73.4 - 100.1
		045L	4167	4195	3833	4478	3627	4579	3737	4652	3412	3599	>70Khrs	46.2	73.8 - 100.7
		050L	4630	4661	4259	4976	4030	5088	4152	5169	3791	3999	>70Khrs	51.3	73.9 - 100.8
	MW	010L	868	873	798	932	755	953	778	969	710	749	>90Khrs	10.2	69.6 - 95.0
		015L	1301	1310	1197	1399	1133	1430	1167	1453	1066	1124	>90Khrs	15.4	69.2 - 94.4
		020L	1735	1747	1596	1865	1510	1907	1556	1937	1421	1499	>90Khrs	20.5	69.3 - 94.5
		025L	2169	2183	1995	2331	1888	2384	1945	2422	1776	1874	>80Khrs	25.6	69.4 - 94.6
		030L	2603	2620	2394	2797	2265	2860	2334	2906	2131	2248	>80Khrs	30.8	69.2 - 94.4
		035L	3037	3057	2793	3264	2643	3337	2723	3391	2486	2623	>80Khrs	35.9	69.3 - 94.4
		040L	3471	3494	3192	3730	3021	3814	3112	3875	2841	2998	>80Khrs	41.3	68.8 - 93.8
		045L	3904	3930	3591	4196	3398	4291	3501	4359	3197	3372	>70Khrs	46.2	69.2 - 94.4
		050L	4338	4367	3990	4662	3776	4767	3890	4844	3552	3747	>70Khrs	51.3	69.2 - 94.4

This chart is for performance selection and may change without notice. Consult IES files for official performance data.


Project:	Catalog #:	Type:
Notes:		

3500K CCT Color Metric Summary					
CCT:	3453	CRI:	83		
Δ					
2700	3000	3500	4000	5000	




TM-30	Rf = 85
	Rg = 95
CRI	Ra = 83
	R9 = 8

3500K CCT Color Metric Summary					
CCT:	3494	CRI:	93		
Δ					
2700	3000	3500	4000	5000	




TM-30	Rf = 91
	Rg = 99
CRI	Ra = 93
	R9 = 63

3500K CCT Color Metric Summary					
CCT:	3500K	CRI:	98		
Δ					
2700	3000	3500	4000	5000	




TM-30	Rf = 94
	Rg = 101
CRI	Ra = 98
	R9 = 98

4000K CCT Color Metric Summary					
CCT:	3933	CRI:	82		
Δ					
2700	3000	3500	4000	5000	




TM-30	Rf = 82
	Rg = 94
CRI	Ra = 82
	R9 = <6

4000K CCT Color Metric Summary					
CCT:	4000K	CRI:	92		
Δ					
2700	3000	3500	4000	5000	



TM-30	Rf = 90
	Rg = 99
CRI	Ra = 92
	R9 = 63

4000K CCT Color Metric Summary					
CCT:	4014	CRI:	98		
Δ					
2700	3000	3500	4000	5000	



TM-30	Rf = 94
	Rg = 100
CRI	Ra = 98
	R9 = 98

xxx6-FSx-SS-MED-840K-040L		3748 Lumens	UGR Rating	12	20x30x10h
Medical Downlight Performance			Spacing Criteria: 0-180		1.1
Size	Distribution	Finish	Spacing Criteria: Diag. 0.98		
6"	Medium	Semi-Specular	Beam Angle	66.7	
Watts:	41.3	80CRI	1000	2000	3000 4000
Mtg. Ht. (ft)	Light Level (fc)	Beam Dia. (ft)			
5	145.2	6.6			
6	100.8	7.9			
7	74.1	9.2			
8	56.7	10.5			
9	44.8	11.8			
10	36.3	13.2			

xxx6-FSx-SS-WD-840K-040L		3620 Lumens	UGR Rating	15	20x30x10h
Medical Downlight Performance			Spacing Criteria: 0-180		1.40
Size	Distribution	Finish	Spacing Criteria: Diag. 1.08		
6"	Wide	Semi-Specular	Beam Angle	70.1	
Watts:	41.3	80CRI	675	1360	2025 2700
Mtg. Ht. (ft)	Light Level (fc)	Beam Dia. (ft)			
5	102.0	7.0			
6	70.8	8.4			
7	52.0	9.8			
8	39.8	11.2			
9	31.5	12.6			
10	25.5	14.0			

xxx6-FSx-PL-WD-840K040L		4070 Lumens	UGR Rating	14	20x30x10h
Medical Downlight Performance			Spacing Criteria: 0-180		1.25
Size	Distribution	Finish	Spacing Criteria: Diag. 1.06		
6"	Wide	Platinum	Beam Angle	73.4	
Watts:	41.3	80CRI	800	1600	2400 3200
Mtg. Ht. (ft)	Light Level (fc)	Beam Dia. (ft)			
5	125.6	7.5			
6	87.2	8.9			
7	64.1	10.4			
8	49.1	11.9			
9	38.8	13.4			
10	31.4	14.9			

This chart is for performance selection and may change without notice. Consult IES files for official performance data.