

Project
Type
Date
Cat #

Application Features

Specification-grade, LED modular linear lighting luminaire. This luminaire is suitable for surface or aircraft cable mounting.



Specifications

Optical System

Standard diffuser is frosted extruded snap-in acrylic lens.

Mounting

Standard aircraft cable for suspended-mount application (nominal 4 foot suspension). Mounting holes are provided for surface-mount applications.

Construction

Extruded aluminum housing.

Finish

White, polyester powder painted housing.

Electrical

Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver L80 performance > 50,000 hours. Supplied with dimmable drivers (0-10v). Standard 4 foot nominal white, single-circuit. All electrical components are CSA approved or UL listed.

Approvals

Approved to CSA/UL standards.



Warranty

5 year limited warranty. For complete warranty terms visit: http://viscor.com/assets/Viscor_LED_Warranty.pdf

Features

- Available in pendant, surface and wall mount configurations
- Frosted extruded acrylic lens
- 80+ CRI
- Standard low voltage dimming (0-10V)

Options & Adders


- Emergency Lighting Battery Pack (Remote Mount Only)

Applications

- Office Areas
- Perimeters
- Retail Stores
- Corridors
- Classrooms
- Libraries
- Hospitality

INDUSTRIAL/COMMERCIAL LIGHTING

Dimensions

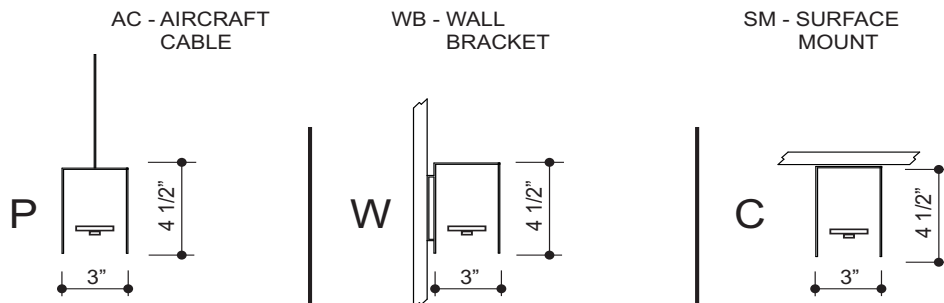

Project
Type
Date
Cat #

LMEZX LED Mezuzah Multi-Function

Specification-Grade Surface/Pendant-Mounted Luminaire



Photometrics - Please consult www.viscor.com for photometric results.

Ordering

Ordering code structure: **LMEZX** [Mounting] [Nominal Fixture Length (in.)] - [Lamp Type] [CRI] [CCT] [Voltage] - [Options]

Mounting
C - Surface Ceiling
P - Pendant/Downlight
W - Wall Downlight

Nominal Fixture Length (in.)
24
48
96
144

Lamp Type
LED

CRI
8 - (80-89)

CCT
35K - 3500 K
40K - 4000 K

Voltage
UNV - 120-277V
347 - 347V*

Nominal Lumens

24"	011L - 1100
48"	022L - 2200
96"	044L - 4400
144"	066L - 6600

Options

Driver Options

- B39 Emergency Lighting Remote Battery Pack - LED

Finish Options (select one only)
(F09 - Easy White is standard)

- F01 Black
- F14 Silver Reflective

Configuration

- M02 Beginning of Row (1 End)
- M03 Standalone (2 Ends)
- M05 Middle Section (No Ends)

Example:
LMEZXC48-LED840K022LUNV-M03

* Other options may be available consult factory.
Specifications and data subject to change without notice

Size	Nominal Lumens	Watts
24-in	011L	26
48-in	022L	44
96-in	044L	88
144-in	066L	132