

KIT00136

ERP# IIS00220

Revision Date: July 30, 2025

WARNINGS

Electric shock:

- Disconnect or turn off power before installing or servicing luminaire.
- All electrical wiring to be completed by a qualified licensed electrician in accordance with local and National/Canadian Electrical Code.
- Ensure supply voltage corresponds with the correct ballast/driver voltage.
- Avoid exposing wiring to metal edges and sharp objects.
- Ensure that the luminaire is properly grounded to prevent electric hazards.

Fire:

- Keep flammable and combustible materials away from the light source and/or lens.
- Use correctly rated supply conductors as indicated by product labeling.

Burn:

- Allow luminaire to cool before handling luminaire.

Personal Injury:

- Wear safety glasses and gloves when handling the luminaire to avoid physical injury.
- Avoid direct eye contact with light source.
- Always support the weight of the luminaire.

KIT00136


RECESSED FLANGE KIT
*Compatible with Series
LRT's & LP*

CEILING CUT-OUT OPENING
12 3/4" x 48 1/2"

(2) SIDE FLANGE
ASSEMBLY

(2) END SPACER BAR
MAINTAINS PROPER
WIDTH CONTROL


(2) END FLANGE TRIMS ARE PRES-
SURE FIT & REMOVABLE FOR ROW
MOUNTING INSTALLATION

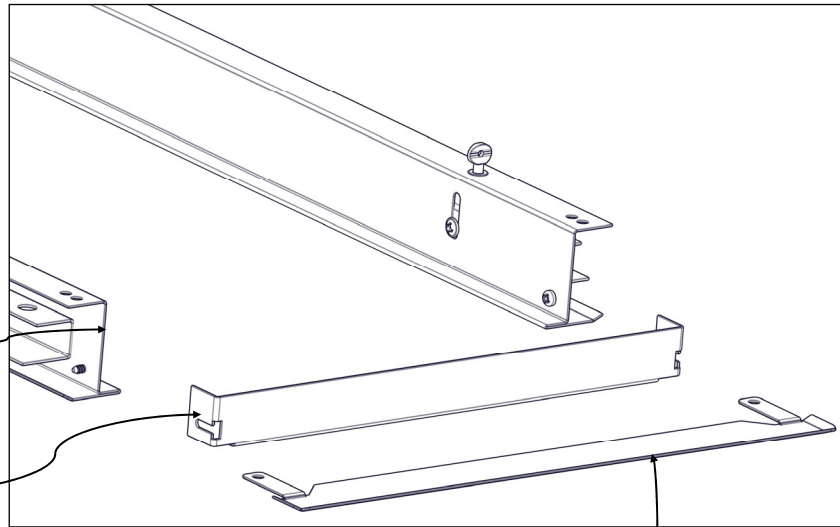

LP1X4 LUMINAIRE SHOWN
(NOT INCLUDED IN KIT)

Note:

Due to possible uneven ceiling surfaces, some light leaks may appear at the flange/ceiling junction. It may be necessary to manually bend the end trims to suit.

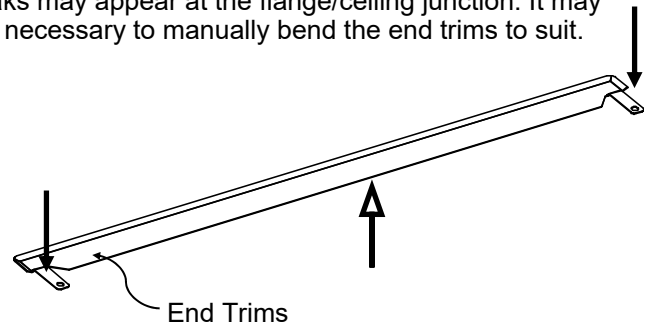

NOTE: For use in Cleanroom Spaces

1. Sealing the Flange Kit:

Seal the perimeter of the flange kit adjacent to the surface and any other visible seams using site approved sealant (by others). Sealing should be applied in a manner that prevents the ingress of dust, debris and any airborne contaminant particles.

KIT00136

ERP# IIS00220

Revision Date: July 30, 2025

