




INTRODUCING

LEL – LED ELLIPSE

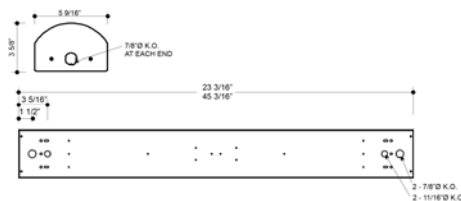

Premium-Grade LED Strip Luminaire

Visioneering's LED Ellipse luminaire offers sleek design and efficient performance. The LEL features state-of-the-art LED technology accompanied with standard 0 to 10v dimming for improved energy savings. The die and break formed steel housing and ends provide the industrial-grade ruggedness required for a wide range of indoor applications. The LEL can be surface mounted or suspended and features a standard polyester powder painted surface.

Features:

- Shallow design
- Surface or suspension mounting
- Available in 24" and 48" lengths
- 80+ CRI
- Standard low voltage dimming (0-10v)
- 2,000 – 8,200 lumens

Specifications:


- Frosted impact acrylic ribbed lens
- White polyester powder painted
- Rated to deliver L80 performance > 50,000 hours
- Approved to CSA/UL standards
- **Applications:** Commercial Spaces, Cold Storage, Parking Garages, Retail Shelving

Specifications and dimensions subject to change without notice. Consult your representative or www.viscor.com for additional information.

Item #	Catalog #	Lumens*	Watts*	CCT*	Voltage	Pallet Qty	DLC	Delivery
24"								
40953	LEL24-LED835K020LUNV	2000	21	3500	120-277			
39063	LEL24-LED840K020LUNV	2000	21	4000	120-277			
41014	LEL24-LED835K041LUNV	4100	40	3500	120-277		✓	
39878	LEL24-LED840K041LUNV	4100	40	4000	120-277		✓	
48"								
39281	LEL48-LED835K041LUNV	4100	40	3500	120-277		✓	
38664	LEL48-LED840K041LUNV	4100	40	4000	120-277		✓	
38413	LEL48-LED835K053LUNV	5300	51	3500	120-277		✓	
38320	LEL48-LED840K053LUNV	5300	51	4000	120-277		✓	
39792	LEL48-LED835K082LUNV	8200	83	3500	120-277		✓	
38854	LEL48-LED840K082LUNV	8200	83	4000	120-277		✓	

*Values are nominal

Dimensions

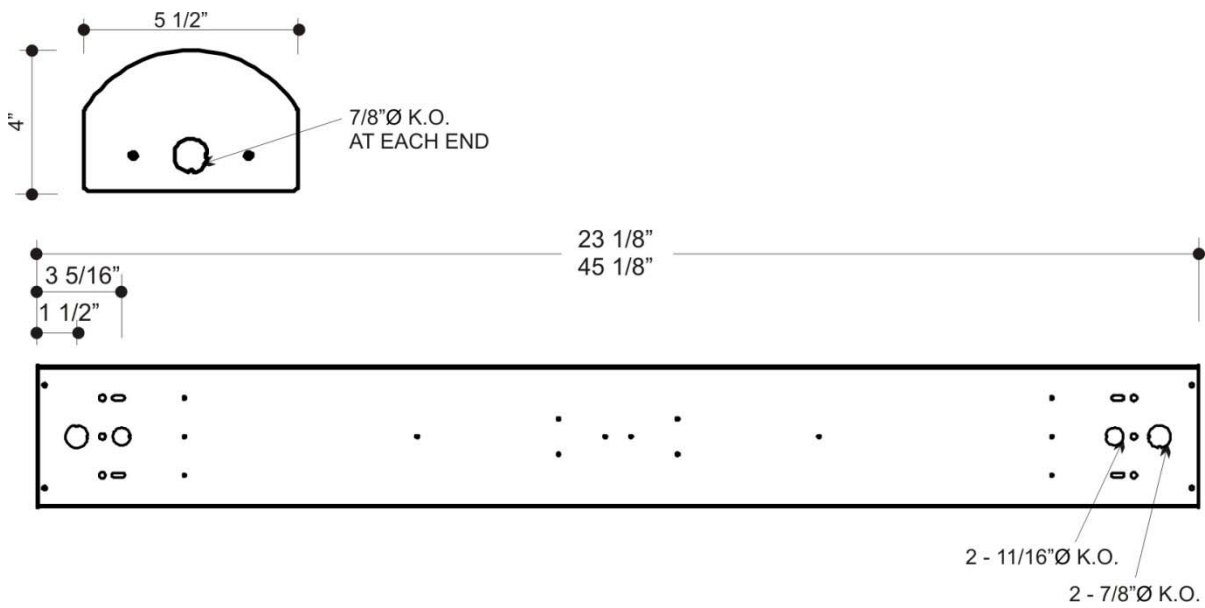

201509A

Specifications and dimensions subject to change without notice. Consult your representative or www.viscor.com for additional information.