
**Back View****End Views****V69 Option**

PRODUCT UPDATE:

LTRI – LED TRI LIGHT



Specification-Grade Contemporary Surface/Wall mount LED luminaire

The Visonneering LTRI luminaire successfully combines savvy design flair with practical functionality and efficiency. The LTRI (with sensor option) provides a standby low-light level, and upon detection of motion in a space, immediately increases the lighting to full brightness. When occupancy is no longer detected, the luminaire reverts back to the lower, standby level. Visonneering's LTRI can save energy and provide safety by ensuring full light levels only when required.



Features:

- Unique ADA compliant design
- Smooth, white opal polycarbonate diffuser
- Available in 24 and 48 inch lengths
- Perfect for wall or ceiling mounting
- White, polyester powder painted surfaces
- Ultrasonic Occupancy Sensor available


Specifications and dimensions subject to change without notice. Consult your representative or www.viscor.com for additional information.




Item #	Catalog #	Lumens*	Watts*	CCT*	Voltage	DLC	Delivery
1,600 LUMEN							
37934	LTRI24-LED835K016LUNV	1600	26	3500	120-277		10 Day
33806	LTRI24-LED840K016LUNV	1600	26	4000	120-277		10 Day
39735	LTRI24-LED835K016LUNV-V69	1600	26	3500	120-277		10 Day
39736	LTRI24-LED840K016LUNV-V69	1600	26	4000	120-277		10 Day
3,200 LUMEN							
38715	LTRI48-LED835K032LUNV	3200	42	3500	120-277		10 Day
38460	LTRI48-LED840K032LUNV	3200	42	4000	120-277		10 Day
39733	LTRI48-LED835K032LUNV-V69	3200	42	3500	120-277	✓	10 Day
39732	LTRI48-LED840K032LUNV-V69	3200	42	4000	120-277	✓	10 Day

*Values are nominal


Dimensions

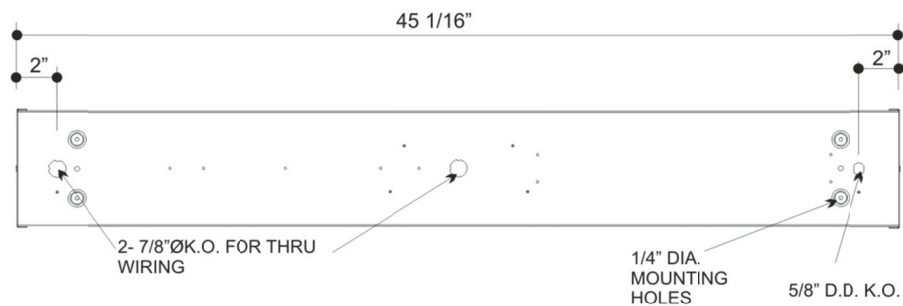

Back View



End Views

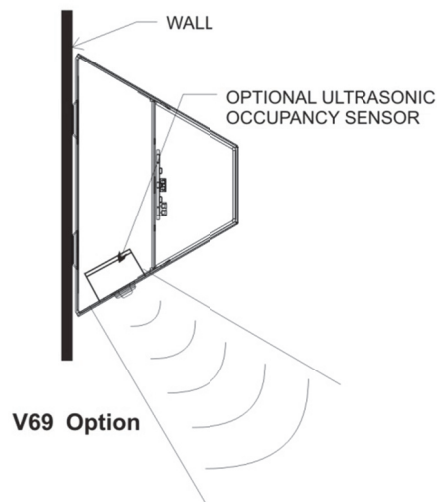

201605A

Specifications and dimensions subject to change without notice. Consult your representative or www.viscor.com for additional information.