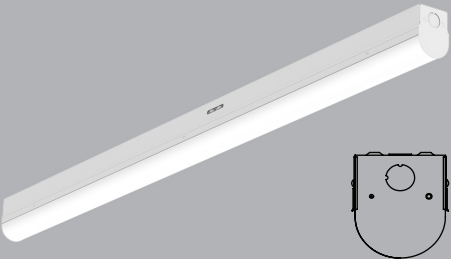
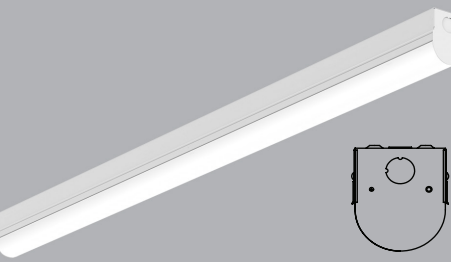
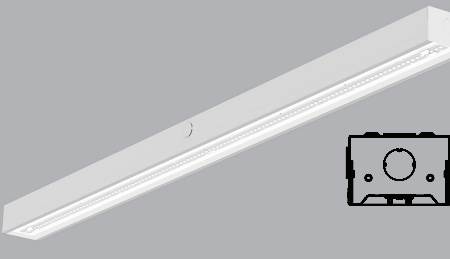
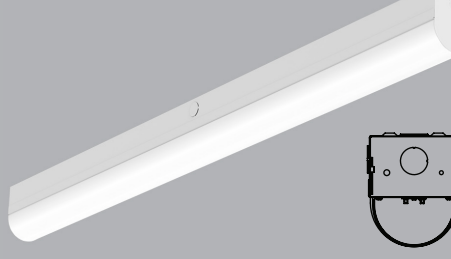
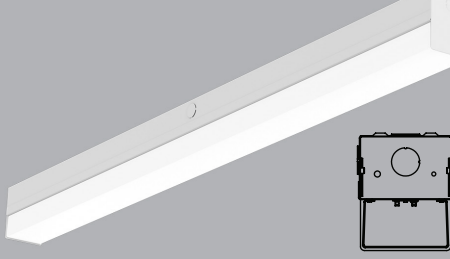
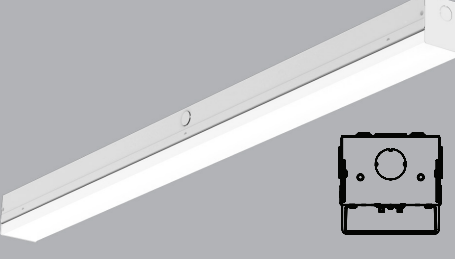
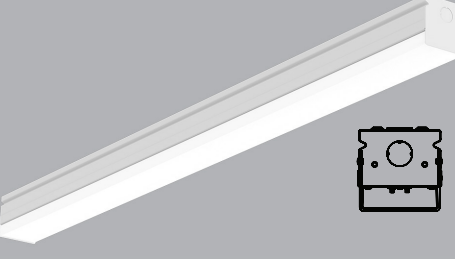
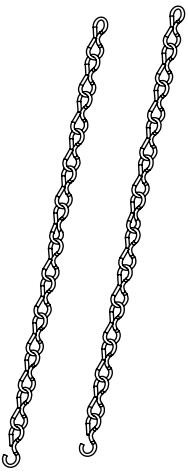
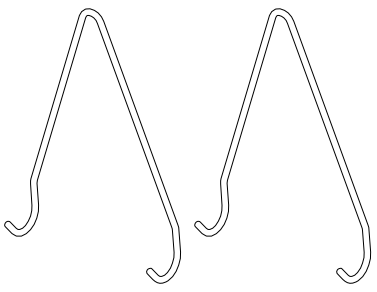
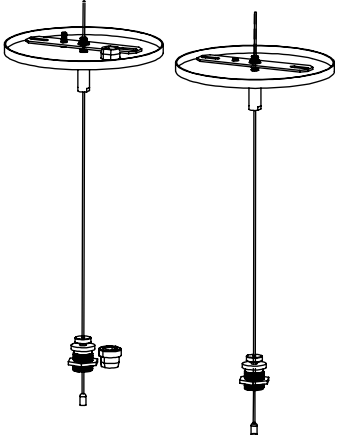

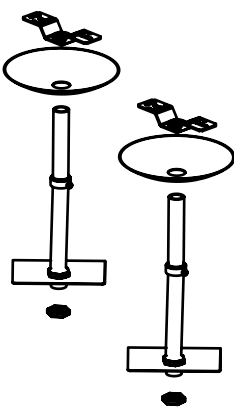
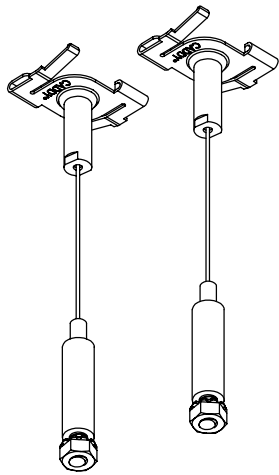
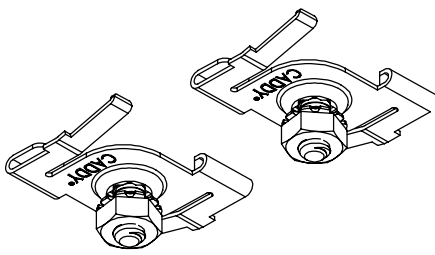



	Size	Lumens	Wattage	Voltage	CCT	Dimension	Accessories				
LCOMN-Select	4 ft	2600 - 4400 lumens	19 - 35 w	UN3	3500 - 5000K	Width: 2.063"					
	8 ft	5200 - 8800 lumens	38 - 70 w	Dimming: 10% (Standard)		Depth: P77: 2.875"					
LCOMN	2 ft	2000 lumens	14 w	UNV / 347	3500K	Width: 2.063"	• Step-Dim • EM				
	4 ft	2000 - 4000 lumens	14 - 31 w	Dimming: 10% (Standard)	4000K	Depth: P77: 2.875"					
	8 ft	4000 - 8000 lumens	29 - 56 w		5000K	P95: 2.875"					
LCOMD	2 ft	1500 - 4400 lumens	10 - 30 w	UNV / 347	3500K	Width: 2.865"	• Step-Dim • EM • Reflectors • Wireguard				
	4 ft	3000 - 10000 lumens	19 - 63 w	Dimming: 1% (Standard)	4000K	Depth: No lens: 2.034"					
	8 ft	7000 - 20000 lumens	44 - 129 w		5000K	P77: 3.644" P95: 3.644" P121: 2.894"					
LCOMF	2 ft	1500 - 4400 lumens	10 - 30 w	UNV / 347	3500K	Width: 2.865"	• Step-Dim • EM • Reflectors • Wireguard • Flexible installation brackets				
	4 ft	3000 - 10000 lumens	19 - 63 w	Dimming: 1% (Standard)	4000K	Depth: No lens: 2.049"					
	8 ft	7000 - 20000 lumens	44 - 129 w		5000K	P77: 3.669" P95: 3.669" P121: 2.919"					

Mounting Accessories

Chain Set Chain Set (2) 4ft w/ S-hooks.M10 	Speedy Hangers Speedy Hangers (2).M23 	Aircraft Cable & Canopy Aircraft Cable & Canopy Set (2) 4ft.M48 (Cord not included with the kit) 	Stem & Canopy Set Sloped Ceilings - Stem & Canopy Set Sloped Ceilings (2) 3ft.M29 - Stem & Canopy Set Sloped Ceilings (2) 4ft.M29 - Stem & Canopy Set Sloped Ceilings (2) 6ft.M29 	Stem & Canopy Set - Stem & Canopy Set 3/8"IP (2) 4ft.M26 - Stem & Canopy Set 3/8"IP (2) 2ft.M26 - Stem & Canopy Set 3/8"IP (2) 1ft.M26 - Stem & Canopy Set 3/8"IP (2) 3ft.M26 - Stem & Canopy Set 3/8"IP (2) 6ft.M26 	T-Bar Suspension Kit T-Bar Suspension Kit (2) 	T-Bar Surface Kit T-Bar Surface Kit (2) 	Flexible Installation Brackets Flexible Installation Brackets (2)  Only applicable to LCOMF
---	--	--	--	---	--	--	---

Universal to all LCOM products:

CRI Available	80+
Standard Feature	Surface mounting, Row mounting
Option	Cord Feed
Color Finishes	White, Black, Grey, Custom colors also available. Consult factory
L70, L80, L90 Performance	>60,000 hrs
Approvals & Ratings	DLC listed Suitable for Damp Locations
Control Types	Wired & Wireless controls available on most models. Consult factory

