

Viscor Inc. 35 Oak Street Toronto, ON Canada M9N 1A1 www.viscor.com

Recessed Installation Instructions

NOTES

- Installation should be completed by an individual familiar with the construction and operation of the luminaire.
- Installation of luminaire must be in accordance with nation and local building and electrical codes.
- Carefully read and follow all warnings and instructions before installing or servicing the luminaire.
- Instructions do not cover all details and all possible product configurations
- Do not restrict luminaire ventilation.
- Ensure LED luminaire is not covered with material that will prevent convection or conduction cooling.
- Do not exceed luminaire's maximum ambient temperature.
- Ensure LED luminaire has the correct polarity before installation.
- This product has maximum rated output of 56Vdc. This output complies with the definition of Class 2 per Canadian Electrical Code. This output cannot be accessible based on maximum voltage restrictions for Class 2 circuits in Canadian Electrical Code. This product complies with this requirement since the installation instruction requires installation in restricted access area.

WARNINGS

Electric shock:

- Disconnect or turn off power before installing or servicing luminaire.
- All electrical wiring to be completed by a qualified licensed electrician in accordance with local and National/Canadian Electrical Code.
- Ensure supply voltage corresponds with the correct ballast/driver voltage.
- Avoid exposing wiring to metal edges and sharp objects.
- Ensure that the luminaire is properly grounded to prevent electric hazards.

Fire:


- Keep flammable and combustible materials away from the lamp and/or lens.
- Ensure lamps are installed correctly.
- Use correctly rated supply conductors as indicated by product labeling.

Burn:

- Allow luminaire and lamps to cool before handling luminaire or changing lamp.
- Follow all warnings, restrictions and recommendations given by the lamp manufacturers.

- Wear safety glasses and gloves when handling the luminaire to avoid physical injury.
- Avoid direct eye contact with light source.
- Always support the weight of the luminaire.

Viscor Inc. is not responsible for any injuries due to the improper installation of handling of its products.

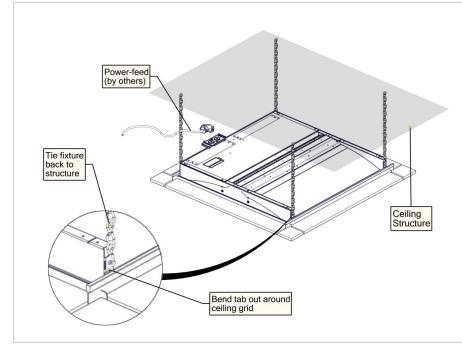

- 1. Carefully remove luminaire from packaging.
- 2. Install the luminaire into the t-bar ceiling grid and ensure that the luminaire is properly set.
- 3. Bend tabs (earthquake clips) out from housing and rest luminaire securely on t-bar.
- 4. In accordance with local building codes, tie support cables/chains to building structure at appropriate locations on the luminaire.
- 5. Remove access plate and remove necessary K.O.'s from access plate for attachment of electrical power feed cable.
- 6. Make the necessary wiring connections and ground connections in accordance with local electrical and /or building codes.
- 7. Reattach access plate to luminaire and secure access plate screw.
- 8. Install lens.







