

Project:	Catalog:	Type:
Notes:		

### Product Description

The CRUo recessed lighting series by Certolux is engineered for environments where precision and cleanliness are non-negotiable. Designed for ISO Class 3-8 cleanrooms, this IP65-rated luminaire delivers superior protection against dust and water ingress, making it ideal for controlled spaces in pharmaceutical, biotech, and healthcare facilities. Its overlapping doorframe ensures a seamless seal to the ceiling and housing, eliminating gaps that could compromise sterility. Built for wet locations and insulated ceilings, the CRUo combines durability with advanced LED technology for consistent performance.

### Feature Options

- Plenum Access Panel
- Tunable White

### Housing

Precision formed, seam welded, one-piece, hole-free construction. 20 gauge cold rolled steel standard. Rigid 18 gauge flange with welded and rounded corners for safety. Stainless Steel and Aluminum are available options. 5 Stage pretreatment and gloss white polyester powder coated after fabrication. ASTM B117 1000hr salt spray compliant.

### Door Frame

Overlapping one-piece 18 gauge cold rolled steel standard, optional types 304 or 316 stainless steel or aluminum. Welded corners blended smooth. Countersunk flat head, stainless steel, captive fasteners with integral silicone o-rings. Door frame is removable, reversible, and hinged by stainless steel aircraft cables. Highly resilient and chemical resistant CertaSeal micro cellular closed-cell gasket seals door frame to the housing and/or ceiling.

### Lens & Lens Retention

Standard lens; Impact resistant 0.125" thick diffuse symmetric acrylic lens (DSA). Smooth external surface for easy cleaning. Sealed to door frame with RTV silicone sealant and retained by continuous perimeter brackets. See order code for other options.

### Gasket Systems

Triple gasketed: Lens: RTV 100% pure silicone seals lens to door. Door: Highly resilient and chemical resistant CertaSeal micro cellular closed-cell gasket seals door frame to the housing and/or ceiling. Housing: Closed cell neoprene gasket provided to seal flange to ceiling. Door screws: Silicone o-rings with special sealing flat-head screws.

### LED

LED board modules are high efficiency and closely regulated to maintain CRI, color consistency, lumen performance, and efficacy. Select from 3000K, 3500K, 4000K, and 5000K color temperatures with a color consistency of 3 SDCM, standard 80 CRI, optional 90 CRI. Tunable White CCT range is 2700-6500K. Lifetime L90 is greater than 60,000 hrs. Modules are field replaceable and commercially available. Optional amber and red LEDs arrays available alone or in combination with white LEDs. Tunable White options are also available. See specific CRUo-Red & Amber spec sheet [here](#).

### Electrical

The standard electronic driver is constant current, programmable and dimmable to 1% using a 0-10V protocol. High efficiency (>85%) and low THD (<10%). Certified to FCC Part 15, Class A. 120-277Vac or 347Vac, 50/60hz. See "Options" for Lutron™ or DALI driver choices. Internal Emergency Drivers are serviceable from the room side unless otherwise noted. Each LED color is separately circuited.

### Finish

5-stage pretreatment polyester powder coated after fabrication. ASTM B117 1000hr salt spray compliant. Stainless Steel is available with a choice of brushed #4 polished finish or gloss white polyester powder coated.

### Installation

Flange installation is supported by swing style mounting brackets. Bracket vertical range is 1.3-2.9 inches. Grid installation suitable for 1" and 1.5" T-Bar NEMA LE4 Type G ceilings. See ordering key for use with 2" T-Bar Grid systems. (Option C57) Consult factory for compatibility with non-standard grid systems). Ambient operating temperature: -4°F (-20°C) to 104°F (40°C).

### Listings, Certifications and Ratings

UL listed for wet locations under covered ceiling (CAN & USA, ANSI/UL1598 & UL8750). Recessed Type IC for insulated ceilings. NSF2 for Splash zone and non-food zones (See option X5 for Food Zone certification). IEC60529 IP65 (Certified dust-tight and resistant to jets of water). Cleanroom classified ISO3-8. EU GMP Grade A, Suitable for Biosafety BSL1-3. Compliant with CCEA requirements. Rated for 2500psi wash down conditions.

### Warranty

5-year limited warranty. For complete warranty, click here:




Refer to page 2 of the spec sheet for Speedship Items.




### Approvals

- Approved to CSA and UL standards
- RoHS Compliant

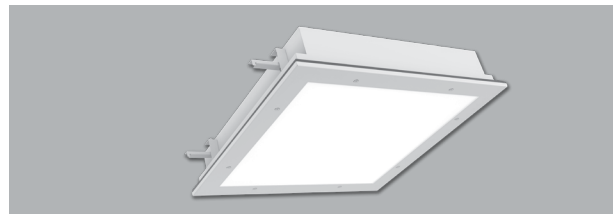

### Dimensions

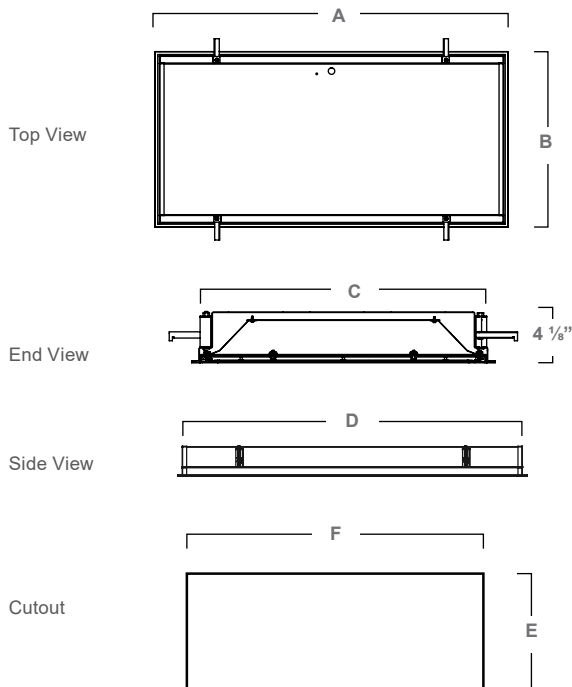

Dimensions (inch) & Weights							
Size	A	B	C	D	E	F	Weight
1x4	47.75	11.75	10.69	46.75	10.88	46.87	32 lbs.
2x2	23.75	23.75	22.69	22.88	22.88	22.88	29 lbs.
2x4	47.75	23.75	22.69	46.75	22.88	46.87	50 lbs.

Consult the installation guide for exact dimensions.

Project:	Catalog:	Type:
Notes:		


## SPEEDSHIP

Order Key for items that ship within 5 days.

SKU	Description
CRUo-2x2A/P-835K-55L-UNV-DSA	<b>CRUo Overlapping Door Frame</b> Size: 2x2 Material Door: A = 18 Ga. CRS Painted (Std.) Material Housing: P = 20 Ga. CRS Painted (Std.) CRI: 80+ CCT: 3500K & 4000K Lumens: 55L & 70L Voltage: UNV - 120-277V Lens: DSA - Diffuse Symmetric Acrylic (Std.)
CRUo-2x2A/P-835K-70L-UNV-DSA	
CRUo-2x2A/P-840K-55L-UNV-DSA	
CRUo-2x2A/P-840K-70L-UNV-DSA	
CRUo-2x4A/P-835K-55L-UNV-DSA	<b>CRUo Overlapping Door Frame</b> Size: 2x4 Material Door: A = 18 Ga. CRS Painted (Std.) Material Housing: P = 20 Ga. CRS Painted (Std.) CRI: 80+ CCT: 3500K & 4000K Lumens: 55L & 70L Voltage: UNV - 120-277V Lens: DSA - Diffuse Symmetric Acrylic (Std.)
CRUo-2x4A/P-835K-70L-UNV-DSA	
CRUo-2x4A/P-840K-55L-UNV-DSA	
CRUo-2x4A/P-840K-70L-UNV-DSA	

### Order Key

EXAMPLE: CRUo2x4A/PLED840K100LUNV-DSA

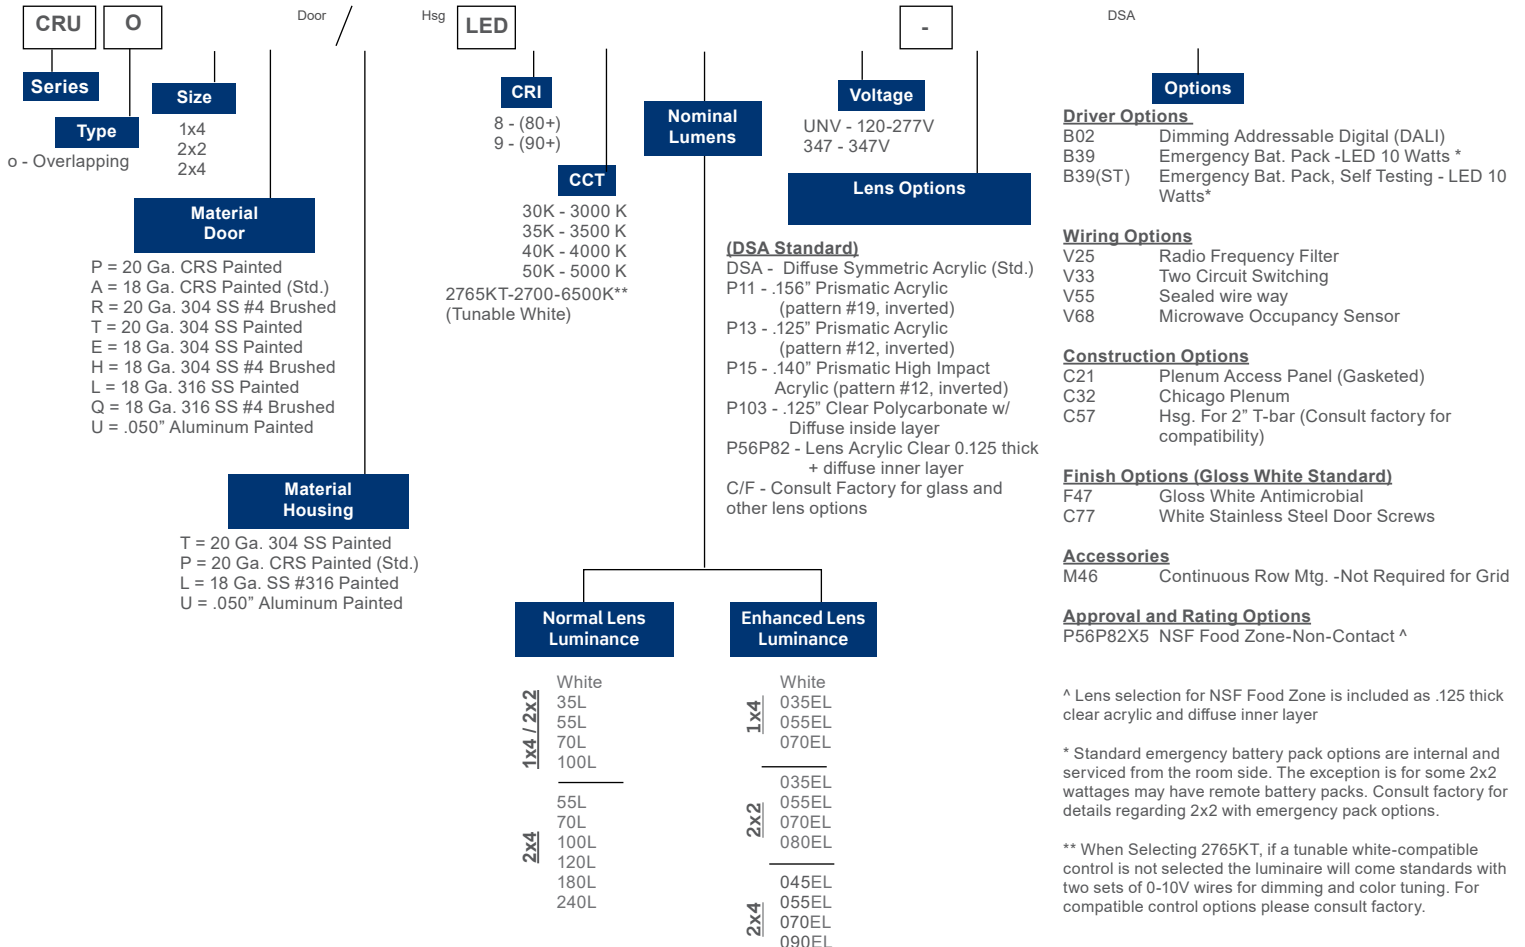

xxxLC= Specified lumens (must be < max. value per size) Consult factory for higher lumen options.

Project:	Catalog:	Type:
Notes:		

Performance Data				
White LED Performance*				
Size	Nominal Lumens Order Code	Lumens (4000K)	Watts	Efficacy
1x4	35L	3585	32	112
	55L	5538	51	109
	70L	7064	68	104
	100L	10100	96	105
2x2	35L	3564	31	115
	55L	5571	50	111
	70L	7035	65	108
	100L	10121	93	109
2x4	55L	5517	45	123
	70L	7085	59	120
	100L	10093	80	126
	120L	12096	99	122
	180L	18103	143	127
	240L	24102	198	122

Enhanced Lens Luminance Performance Data				
White LED Performance*				
Size	Order Code	Lumens (4000K)	Watts	Efficacy
1x4	035LE	3542	28	126
	055LE	5541	45	123
	070LE	7019	58	122
2x2	035LE	3537	29	121
	055LE	5514	47	117
	070LE	7015	62	113
	080LE	8017	71	113
2x4	045LE	4546	40	125
	055LE	5541	45	123
	070LE	7019	58	122
	090LE	9014	76	119

\* Lumen values are based on 4000K, 80 CRI performance.  
See Lumen Multipliers below for other CCT or CRI performance data.

Standard White										
CCT	Lumen Factor	80 CRI				90 CRI				
		CRI	R9	Rf	Rg	Lumen Factor	CRI	R9	Rf	Rg
3000	0.95	80	-	-	-	0.77	90	-	-	-
3500	0.97		12	85	97	0.80		62	91	100
4000	1.00		10	84	97	0.82		68	91	101
5000	1.01		10	84	97	0.84		65	91	98


Tunable White										
CCT	Lumen Factor	80 CRI				90 CRI				
		CRI	R9	Rf	Rg	Lumen Factor	CRI	R9	Rf	Rg
2700K	1.00	82	7	82	98	1.00	90	60	92	100
4000K		86	29	84	100			87	93	104
6500K		82	15	81	97			76	92	101

Project:	Catalog:	Type:
Notes:		

**Photometric Performance**


**CRUo-2X4-LED840K120LUNV-DSA**

Characteristics	
Luminaire Lumens	12096
Efficacy Rating	122
Total Luminaire Watts	99
Spacing Criterion (0-180)	1.2
Spacing Criterion (90-270)	1.18
Spacing Criterion (Diagonal)	1.3

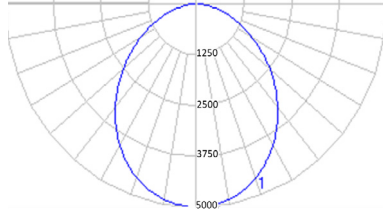

**CRUo-2X2-LED840K070LUNV-DSA**

Characteristics	
Luminaire Lumens	7035
Efficacy Rating	108
Total Luminaire Watts	65
Spacing Criterion (0-180)	1.2
Spacing Criterion (90-270)	1.18
Spacing Criterion (Diagonal)	1.3

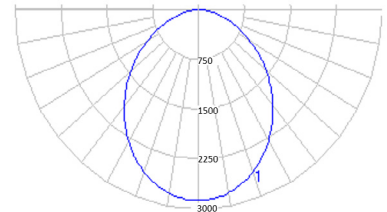

Luminance Data (cd/sq.m)				
Degrees	0-Deg	45-Deg	90-Deg	
45	5674	5695	5291	
55	5043	4729	4612	
65	4212	3863	3743	
75	2972	2572	2543	
85	896	1142	1458	


Zonal Lumens	
Zone	Lumens
0-30	3747.51
0-40	6011.17
0-60	10073
0-90	12096
90-180	0

Luminance Data (cd/sq.m)				
Degrees	0-Deg	45-Deg	90-Deg	
45	6551	6397	6399	
55	5884	5702	5685	
65	4956	4722	4700	
75	3437	3148	3269	
85	1130	1443	1988	

Zonal Lumens	
Zone	Lumens
0-30	2161
0-40	3468
0-60	5845
0-90	7035
90-180	0

**CRUo-1x4-LED840K055LUNV-DSA**


Characteristics	
Luminaire Lumens	5538
Efficacy Rating	109
Total Luminaire Watts	51
Spacing Criterion (0-180)	1.2
Spacing Criterion (90-270)	1.2
Spacing Criterion (Diagonal)	1.28

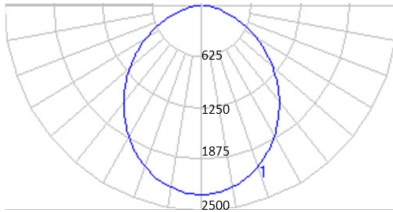


Luminance Data (cd/sq.m)				
Degrees	0-Deg	45-Deg	90-Deg	
45	6551	6397	6399	
55	5884	5702	5685	
65	4956	4722	4700	
75	3437	3148	3269	
85	1130	1443	1988	

Zonal Lumens	
Zone	Lumens
0-30	1720
0-40	2751
0-60	4613
0-90	5538
90-180	0


**Lumen Maintenance**

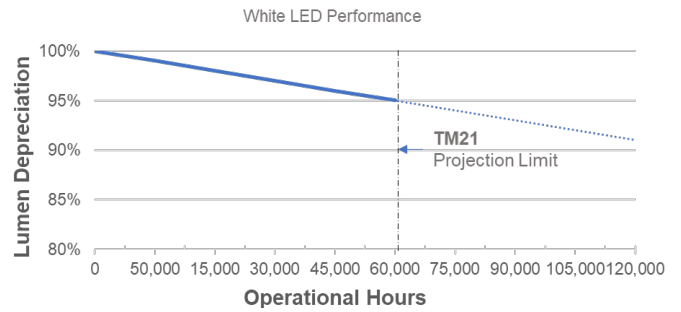


**Installation Details**




Overlapping Door Flanged  
(Framing by others)



Overlapping Door in Grid Ceiling



Overlapping Door Flanged

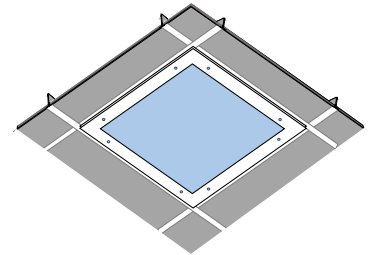

Overlapping Door in Grid Ceiling

Project:	Catalog:	Type:
Notes:		

**V68 Microwave Occupancy Sensor**


**Description**

- Dip Switch Settable step dim levels, hold-off and standby times, and daylight hold off level
- 120-277VAC Operating voltage
- Ideal for use in cleanrooms and vandal resistant fixtures




**Detection Range**

- Diameter\*Height: 12m\*6m Max



Wall mounting pattern (Unit: m)  
Suggested installation height: 1-1.8m




Ceiling mounting pattern (Unit: m)  
Suggested installation height: 2.5-

**Specifications**

Input V	120-277 VAC
Operating Frequency	50/60 Hz
Dimming Load	0-10V Dimming Control
	Sinks <20mA
Operating Temperature	-35C to 55C
Programming	Dip Switch Settable

Max Mounting Height	40ft
Load Rating	400 VA @ 120 VAC
	800 VA @ 220-240 VAC
	1000 VA @ 277 VAC
Power Consumption	<0.5W (standby); <1W (operation)
Motion Detection	0.5 to 3m/w
Ratings	UL Listed

**Programming**

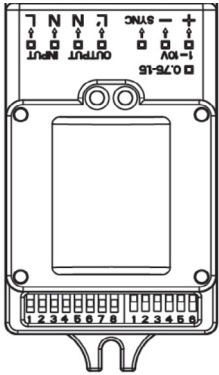

**Detection Area**

ON ↑		1	2	
	I	ON	ON	100%
	II	ON	-	75%
	III	-	ON	50%
	IV	-	-	10%

**Hold Off Time**

ON ↑		3	4	5	
	I	ON	ON	ON	5s
	II	-	ON	ON	30s
	III	ON	-	ON	90s
	IV	-	-	ON	3min
	V	ON	ON	-	20min
VI	-	-	-	30min	

**Standby Time**

ON ↑		6	7	8	
	I	ON	ON	ON	0s
	II	-	ON	ON	5s
	III	ON	-	ON	5min
	IV	-	-	ON	10min
	V	ON	ON	-	30min
	VI	-	ON	-	1h
VII	-	-	-	+∞	


**Daylight Level**

ON ↑		1	2	3	4	
	I	-	-	ON	ON	2Lux
	II	-	-	-	ON	5Lux
	III	-	ON	ON	-	10Lux
	IV	-	-	ON	-	25Lux
	V	-	ON	-	-	50Lux
	VI	ON	-	-	-	100Lux
VII	-	-	-	-	Disable	

**Standby Level**

ON ↑		5	6	
	I	ON	ON	50%
	II	-	ON	30%
	III	ON	-	20%
IV	-	-	10%	

**Wiring Diagram:**

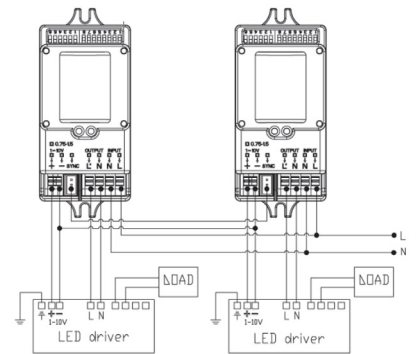

Project:	Catalog:	Type:
Notes:		

**EM Ordering Guide**

EM Function	Order Code	Description	Notes
Standard EM	B39	10W EM battery pack	Standard 10W output, 90 minute run time in emergency mode.
High Wattage EM	B39(20W)	20W EM battery pack	Standard 20W output, 90 minute run time in emergency mode.
347V EM	347...B39	8W 347V EM battery pack	Fixture part number indicates 347V input voltage.
347 High Wattage EM	347...B39(20W)	20W 347V EM battery pack	Fixture part number indicates 347V input voltage.
Self Testing EM	B39(SD)	10W Self test EM battery pack	Self test instructions provided with each fixture. Digital copies available as needed.
Cold Weather	B06...B39	10W Cold weather EM battery pack suitable to -20°C	Standard EM battery pack 0°C minimum temperature.
120 Minute EM	B39(2HR)	EM battery pack with 120 minute minimum run time	Standard 14W output, 120 minute run time in emergency mode.
Specified EM	B39(xx)	Customer to specify brand, model number and/or feature.	xx Indicates model number of specified by Viscor.