

Project:	Catalogue:	Type:
Notes:		

Product Description

The MDTL is a specialty undercabinet task luminaire engineered specifically for applications where clarity, accuracy, and reliability are paramount. Its low profile ensures seamless integration into tight workspaces - delivering bright, focused illumination exactly where it's needed most. Whether it's for examination, preparation, or procedural support, Certolux's MDTL provides optimal task lighting that enhances visibility and reduces eye strain, helping professionals perform with confidence and precision.

Applications

Healthcare, nurses stations, and patient rooms



Features

- Ideal for under cabinet lighting
- Shallow design
- Clear prismatic acrylic diffuser
- Steel housing and ends with black textured finish
- Standard 0-10V dimming

Options

- Convenience outlet
- PIR Occupancy sensor
- Rocker Switch

Optical System

Diffuse opal lens is standard.

Mounting

Key holes provided for easy mounting. Flush mounting surface contains no offsets or exposed fastener heads.

Construction

Formed sheet metal construction. Spot welded for rigidity and clean appearance. Flush-struck KOs on ends, back, and top.

Finish

5-stage pretreatment, polyester powder coating. Antimicrobial and matte white finishes available.

Electrical

Long life LEDs provide quality illumination. Rated to deliver L80 performance for over 50,000 hours.


Warranty

5-year limited warranty. For complete warranty, click here:




Approvals

- ETL Certified to UL1598 and CSA22.2 no 250.0
- Suitable for dry and damp locations
- RoHS Compliant

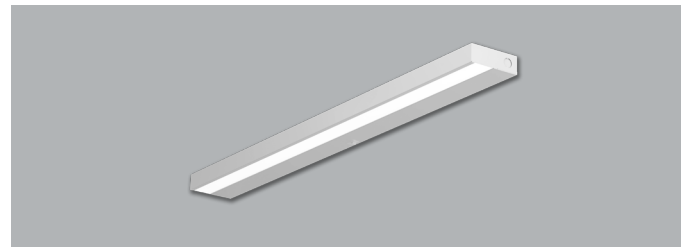

Dimensions

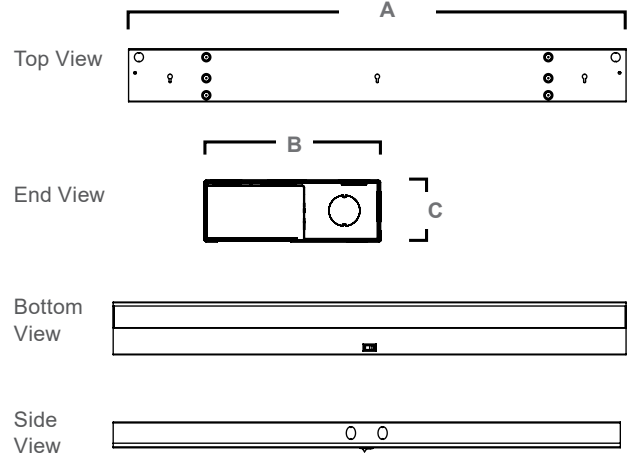


Dimensions (inch)			
Size	A	B	C
12	12	5	1.75
24	24	5	1.75
36	36	5	1.75
48	48	5	1.75

Consult the installation guide for exact dimensions.

Project:	Catalogue:	Type:
Notes:		

Order Key

EXAMPLE: MDTL48-LED9030K020LUNVP73-F09

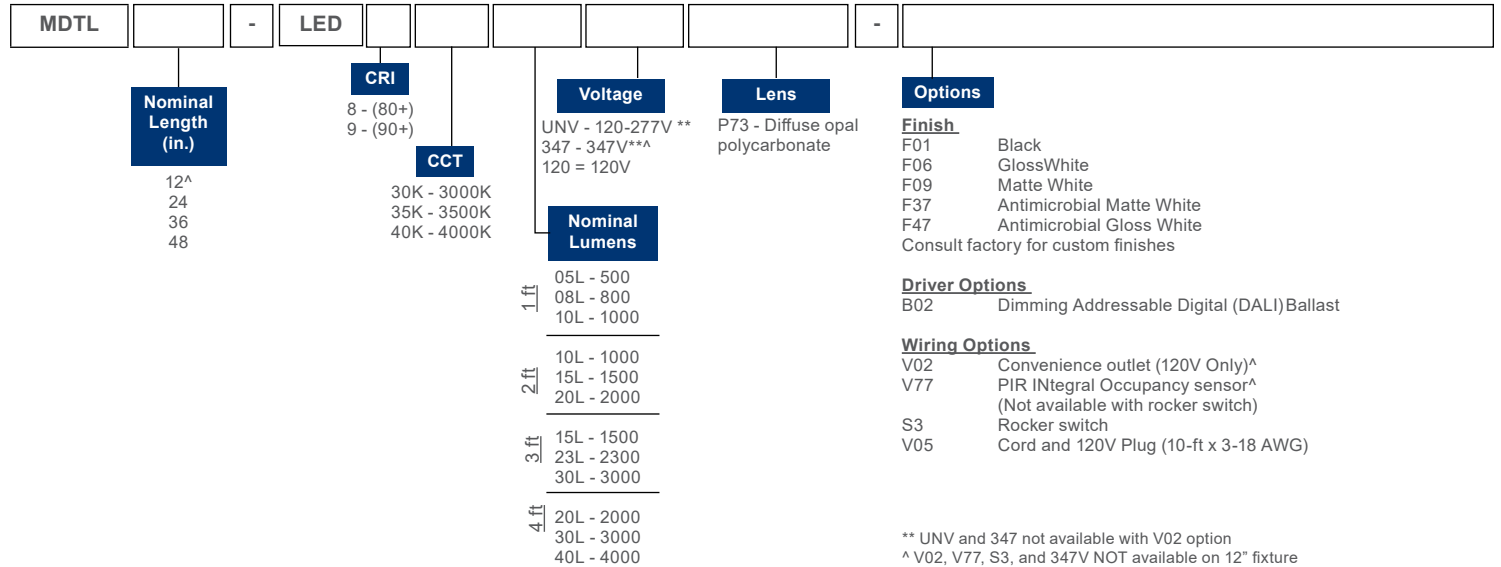

** UNV and 347 not available with V02 option
 ^ V02, V77, S3, and 347V NOT available on 12" fixture

Other options may be available, consult factory.
 Specifications and data subject to change without notice.

Performance Data

Size	Lumens	Watts	Delivered Lumens						Efficacy @840
			830	930	835	935	840	940	
MRITL12	005L	4.8	507	434	515	448	536	469	111.7
	007L	6.3	751	643	763	664	794	695	125.9
	010L	8.8	990	847	1005	875	1047	916	118.4
MRITL24	010L	8.2	957	818	971	845	1011	885	123.5
	015L	12.8	1438	1230	1459	1271	1520	1330	119.1
	020L	17.4	1932	1652	1960	1707	2042	1787	117.1
MRITL36	015L	12.4	1421	1215	1442	1256	1502	1314	120.8
	023L	18.4	2159	1847	2191	1908	2283	1997	124.2
	030L	25.5	2875	2459	2918	2541	3040	2660	119.1
MRITL48	020L	16.4	1913	1636	1942	1691	2022	1770	123.5
	030L	25.5	2875	2459	2918	2541	3040	2660	119.1
	040L	34.9	3819	3266	3876	3375	4037	3532	115.8