

Project:	Catalogue:	Type:
Notes:		

Product Description

MRITL Under-Cabinet Light delivers non-ferrous, MRI-safe illumination ideal for task areas in MRI rooms. Built from aluminum and powered by remote drivers to eliminate interference with imaging equipment, it provides reliable, flicker-free performance. Available in multiple lengths, CCTs, and lumen packages for precise, MRI-compatible lighting.

Applications

MRI Suites

Features

- Non-ferrous construction
- Remote power supply
- Multiple lumen outputs

Optical System

Diffuse opal lens is standard.

Mounting

Key holes provided for easy mounting. Flush mounting surface contains no offsets or exposed fastener heads.

Construction

Constructed of nonferrous aluminum. Spot welded for rigidity and clean appearance. Flush-struck KOs on ends, back, and top.

Finish

5-stage pretreatment, polyester powder coating. Antimicrobial and matte white finishes available.

Electrical

Long life LEDs provide quality illumination. Rated to deliver L80 performance for over 50,000 hours.


Warranty

5-year limited warranty. For complete warranty, click here:




Approvals

- ETL Certified to UL1598 and CSA22.2 no 250.0
- Suitable for dry and damp locations
- RoHS Compliant

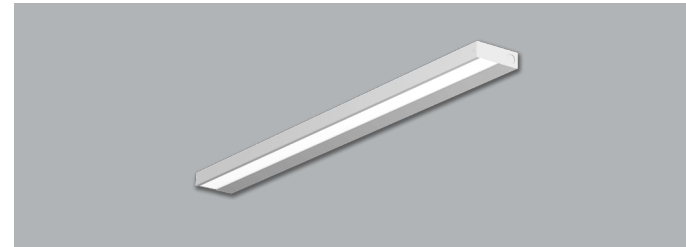

Dimensions

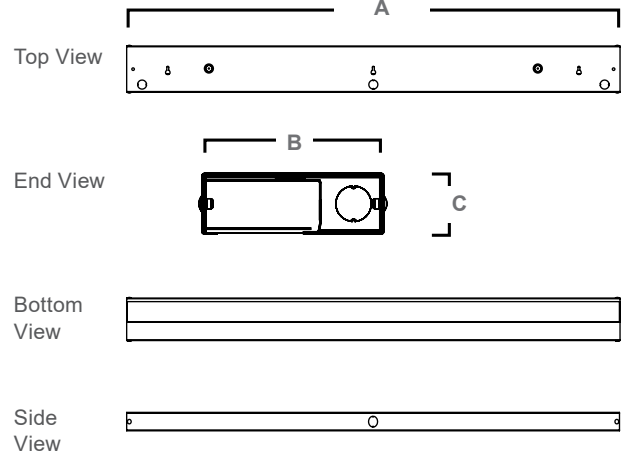


Dimensions (inch)			
Size	A	B	C
12	12	4.5	1.50
24	24	4.5	1.50
36	36	4.5	1.50
48	48	4.5	1.50

Consult the installation guide for exact dimensions.

Project:	Catalogue:	Type:
Notes:		

Order Key

EXAMPLE: MRITL48-LED830K20LDC2P73-F37

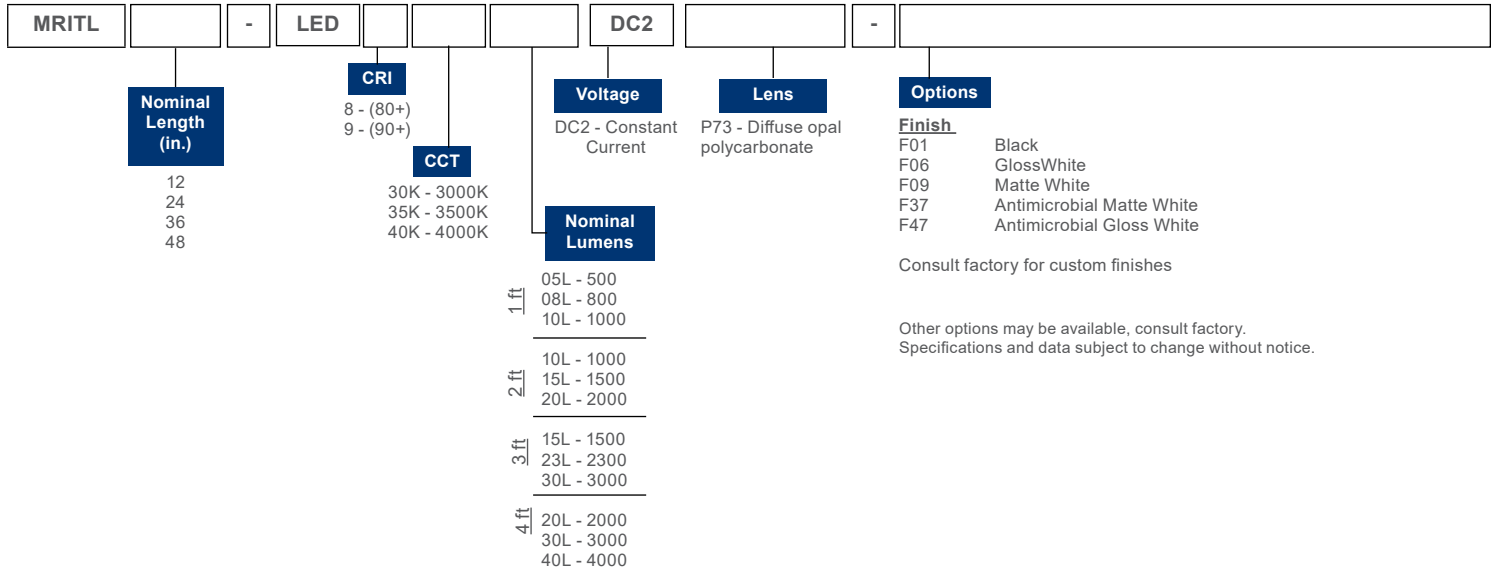

Performance Data											
Size	Lumens	mA	Watts	Delivered Lumens						Efficacy @840	Max Fixtures per circuit
				830	930	835	935	840	940		
MRITL12	005L	100	4.8	566	484	574	500	598	523	124.6	8
	008L	130	6.3	730	625	741	645	772	676	122.3	8
	010L	170	8.8	998	853	1013	882	1055	923	119.3	8
MRITL24	010L	160	8.2	957	819	972	846	1012	886	123.6	8
	015L	240	12.8	1445	1235	1466	1277	1527	1336	119.7	6
	020L	320	17.4	1918	1641	1947	1695	2028	1775	116.3	4
MRITL36	015L	240	12.4	1479	1264	1500	1307	1563	1368	125.7	6
	023L	350	18.4	2134	1825	2166	1886	2256	1974	122.7	3
	030L	470	25.5	2889	2471	2932	2553	3054	2672	119.6	1
MRITL48	020L	310	16.4	1916	1638	1944	1693	2025	1772	123.6	3
	030L	470	25.5	2889	2471	2932	2553	3054	2672	119.6	2
	040L	640	34.9	3837	3281	3894	3391	4056	3549	116.3	1