

Project:	Catalog:	Type:
Notes:		

**Product Description**

The Certolux VRFW wall mounted correctional nightlight is designed to provide comfortable low-level illumination for correctional environments. The VRFW features a downward distribution to keep light on the floor and limit disruption to anyone sleeping in the space. Designed to withstand frequent abuse, the VRFW is constructed of 12ga or 14ga steel, and features lens options up to 0.375" thick clear polycarbonate.



**Construction**

Precision-formed sheet steel construction for housing and door. TIG welded for rigidity. Choice of 14 or 16ga steel.

**Mounting**

Mounted recessed in wall, secured through mounting holes in housing flanges.

**Lens & Lens Retention**

Multiple lens choices for both fixture side and room facing side(see product ordering key for options). The lens is secured with adjustable brackets on housing faceplate.

**Finish**

5-stage pretreatment, polyester powder coating.

**Electrical**

Long life LED's coupled with high efficiency drivers provide quality illumination. Rated to deliver an L80 performance for over 60,000 hours. The standard driver has a THD of <20%. Standard low voltage dimming (0-10v, 1%). All electrical components are CSA or UL approved.

**Warranty**

5-year limited warranty. For complete warranty, click here:




**Approvals**

- CSA and UL listed Damp Location



**Dimensions**

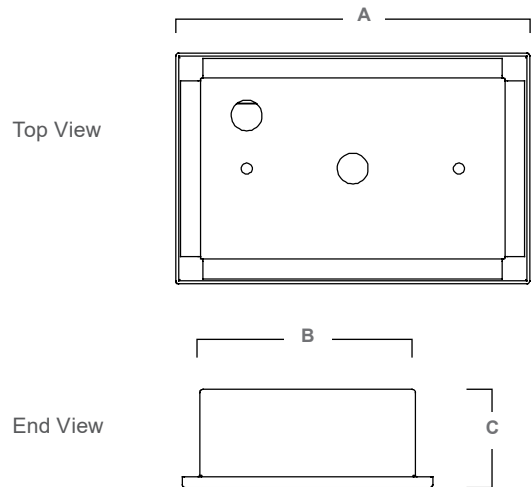


Dimensions (inch)		
A	B	C
10	8.63	3.93

Consult the installation guide for exact dimensions.

Project:	Catalog:	Type:
Notes:		

**Order Key**

**EXAMPLE: VRFW-4143B/CLED840K050L120-P82/P08**

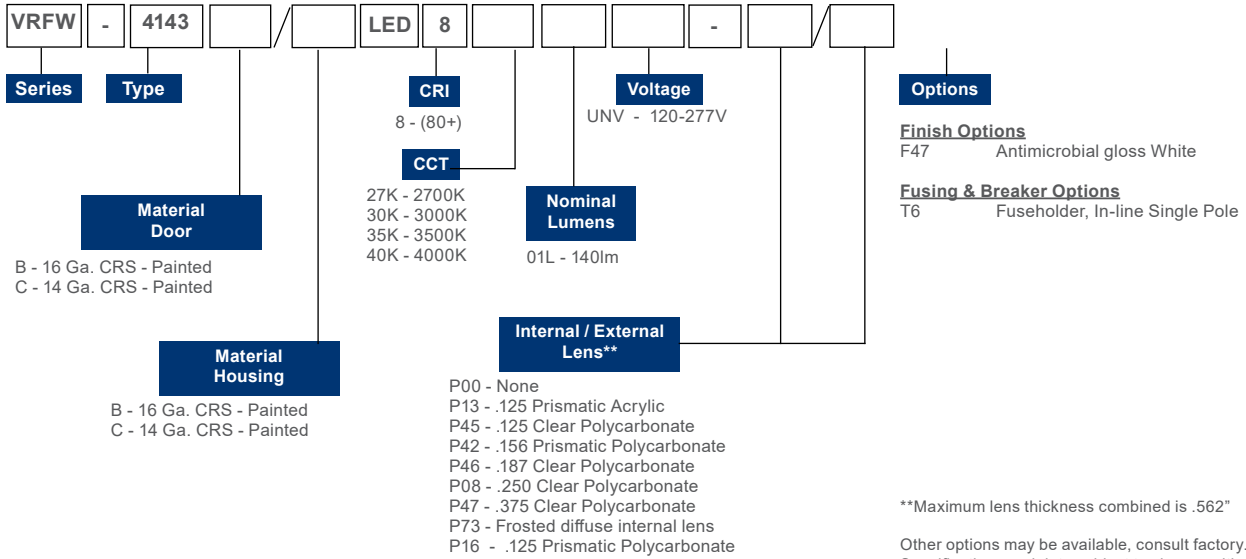

Performance Data	
Nominal Lumens	Watts
140	75