

Project:	Catalogue #:	Type:
Notes:		

### Product Description

The VRIG series by Certolux is a specification-grade, LED luminaire which provides a cost-effective vandal resistant lighting solution. Designed as a sealed Ambient light for behavioural health applications.

### Feature Options

- Emergency LED Battery Pack
- IP65 option available

### Housing

Precision formed, code gauge cold rolled steel. Wiring access plate or knockouts are provided on back of housing, for flexible conduit attachment.

### Mounting

T-Bar mounted and supplied with tabbed holes for independent chain support. Integral earthquake clips.

### Lens

Linear prismatic extruded frosted acrylic diffuser offer high levels of efficiency and visual comfort. The single piece door frame with .125" clear polycarbonate lens is sealed and gasketed for an IP65 rating and allows for easy cleaning.

### Finish

White, polyester powder painted housing.

### Electrical

Long life LED's coupled with high efficiency drivers provide quality illumination. Rated to deliver an L80 performance >50,000 hours. The standard driver has a THD of <20%. Standard low voltage dimming (0-10v, 1%). All electrical components are CSA or UL approved.

### Warranty

5 year limited warranty. For complete warranty, click here: 




### Approvals

- CSA and UL listed.
- Suitable for Damp Location.



### Dimensions

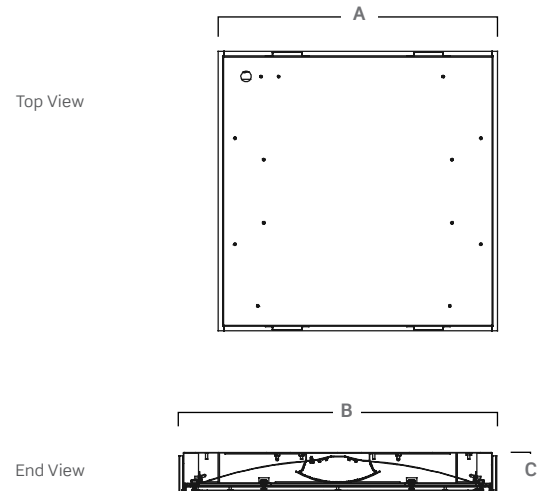


	Dimensions (inch) & Weights		
	A	B	C
2x2	23.75"	23.75"	2.99"
2x4	47.75"	23.75"	3.0"

Consult installation guide for exact dimensions.

Project:	Catalogue #:	Type:
Notes:		

**Order Key**

**EXAMPLE: VRIG-4104-2x4A/ELED840K052LUNV**

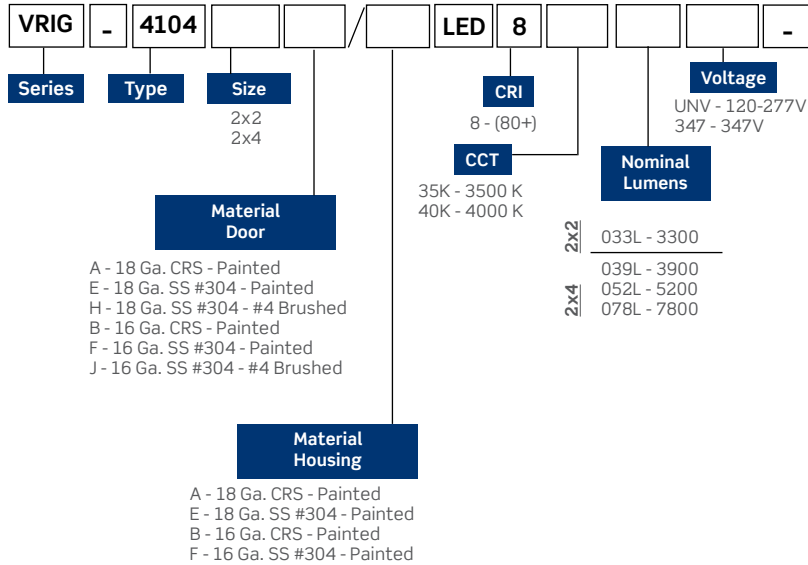

**Options**

**Driver Options**

- B02 Dimming Addressable Digital (DALI)
- B39 Emergency Lighting Battery Pack - LED

**Finish Options**

- F06 Snow White
- F09 Easy White
- F37 Easy White Antimicrobial
- F36 Snow White Antimicrobial

**Packaging Options**

- K0 Bulk Pack/Pallet Packed and/or Wrapped

**Door Lens Options**

- .125 Clear Polycarbonate is standard
- P08 .250 Clear Polycarbonate
- P47 .375 Clear Polycarbonate

**Fusing and Breaker Options**

- T6 Fuseholder, In-line Single Pole

**Wiring Options**

- V25 Radio Frequency Filter
- V39 Night Light - White LED
- V40 Low Voltage Co

**Approvals Options**

- X8 IP65 Rated

\*\*Maximum lens thickness combined is .625"

Other options may be available, consult factory. Specifications and data subject to change without notice.

Performance Data		
Size	Nominal Lumens	Watts
2x2	3300	31
2x4	3900	36
	5200	47
	7800	75

\* Lumen values are based on 4000K, 80 CRI performance. See Lumen Multipliers below for other CCT or CRI performance data.