



Project
Type
Date
Cat #

## Application Features

Specification-grade, T5 staggered fluorescent strip luminaire. For use with indoor applications where continuous uniform row lighting without "socket-end" dark spots is desired (such as coves). Ideal for applications where compact design and high-performance is required. Available in nominal lengths from 22 to 96 inches.

## Specifications

### Mounting

Mounting holes are provided.

### Construction

Die and brake-formed, code gauge, pre-painted white steel. Single wireway cover on non-tandem units. Sufficient knockouts are provided on ends and back to accommodate multiple mounting configurations.

### Finish

Pre-painted, high-reflectance white housing.

### Electrical

Rotary lampholders ensure positive lamp retention. Sufficient knockouts are provided for connections and through wiring.

### Approvals

Approved to CSA and UL standards.

## Features

- Narrow Design
- Heavy-duty construction
- Available with 1 or 2 lamps (T5 configurations)
- Designed specifically for row-mounting
- Overlapping lamps eliminate "socket-end" dark spots
- Available in lengths from 22 to 96 inches


## Options & Adders

- Asymmetric, half or full reflector available in white or enhanced specular aluminum with a reflectance of 95%
- Multi-level switching
- Dimmable ballast
- 20 gauge riveted construction
- In-line fuse holder

## Applications

- Coves
- Display Cabinets
- Valances

## Dimensions

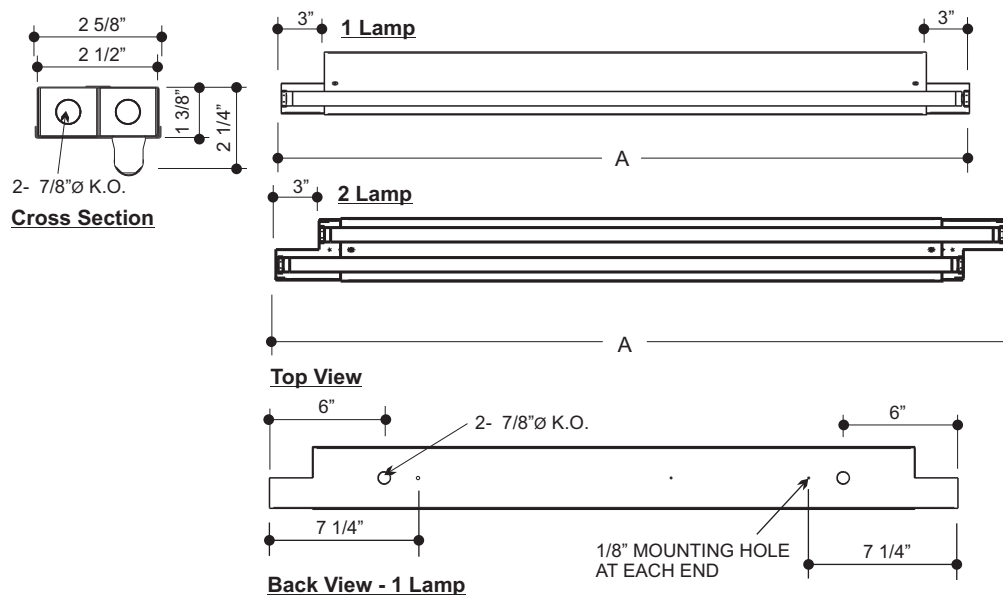

MODEL	NOMINAL LENGTH	ACTUAL LENGTH A (in.)
122	2'	22 7/16
134	3'	34 1/4
146	4'	46 1/16
158	5'	57 7/8
134/2	6'	65 1/2
146/2	8'	89 1/8

MODEL	NOMINAL LENGTH	ACTUAL LENGTH A (in.)
222	2'	25 7/16
234	3'	37 1/4
246	4'	49 1/16
258	5'	60 7/8
234/2	6'	71 1/2
246/2	8'	95 1/8

