

Magic Prestige

Premium-Grade Surface-Mounted Cloud Light Ceiling Luminaire

Project	
Туре	
Date	
Cat #	

Application Features

Premium-grade, surface-mounted wrap-around ceiling luminaire. For use with indoor applications where contemporary styling and energy-efficiency are primary considerations. Regressed housing provides a floating appearance.



Specifications

Optical System

Standard diffuser is soft matt white opal acrylic designed for even and low-glare illumination.

Mounting

Mounting holes are provided within offset to prevent distortion of housing when tightening mounting fasteners. Offset mounting pads which keep luminaire level and slightly off of the mounting surface are formed within the housing. Mounts over electrical junction box.

Construction

Die-formed, code gauge steel housing. Ballast cover snaps into place eliminating the need for tools when accessing the ballast.

Finish

Pre-painted, high-reflectance white housing.

Rotary lampholders ensure positive lamp retention. Sufficient knockouts are provided for connections and through wiring.

Approvals

Approved to CSA and UL standards.

Features

- · Contoured sides provide a cloud-like floating profile
- Available with 2, 4 or 6 lamps (T5, T8 and PLL/Biax configurations)
- · Diffuser hinges from either side in a lift and shift manner and is self-centered for easy re-lamping and re-ballasting
- White opal acrylic wrap-around diffuser
- Available in a variety of sizes please consult the product key for options


Options & Adders

- Dimmable and Emergency ballast
- · Stem and canopy sets
- Consumer packaging

Applications

- Fitting Rooms
- Kitchens
- Recreation Rooms
- Utility Areas

Dimensions

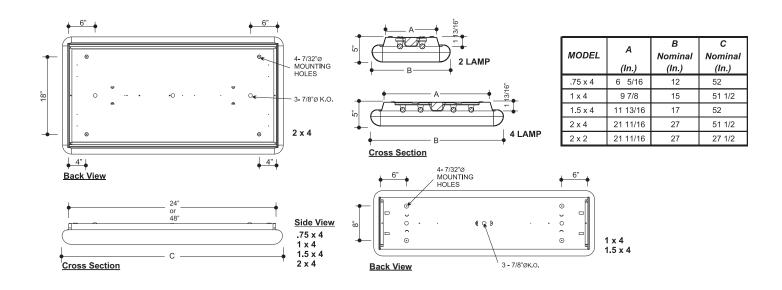

9
\neq
두
ত
⊐
J
⋧
5
Œ.
잂
Ε
天
Q

Project
Туре
Date
Cat #

MPRE Magic Prestige


Premium-Grade Surface-Mounted Cloud Light Ceiling Luminaire



VISIONEERING

Photometrics - MPRE2x24L-T832N120 - Efficiency 57.8%

Candle Distribution




Luminance \$	Summary-CD. /	SQ.	M
--------------	---------------	-----	---

ALONG	45	ACROSS
1759	1734	1776
1710	1653	1752
1610	1554	1701
1472	1402	1556
1427	1342	1583
	1759 1710 1610 1472	1759 1734 1710 1653 1610 1554 1472 1402

Candle Power Summary

LUMENS	% LAMP	% LUMINAIRE
743.20	13.80	23.80
1232.90	22.80	39.50
2257.00	41.80	72.30
3122.60	57.80	100.00
-	-	-
865.60	16.00	27.70
0.00	0.00	0.00
3122.60	57.80	100.00
	743.20 1232.90 2257.00 3122.60 - 865.60 0.00	743.20 13.80 1232.90 22.80 2257.00 41.80 3122.60 57.80

Ordering

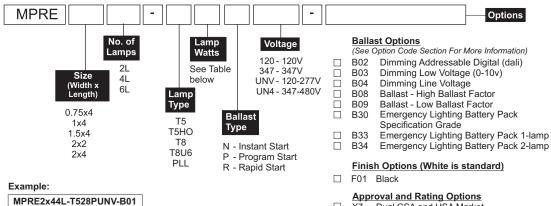

Lamp Watts

	Nom. Lamp Watts				
Size	T5	T5HO	Т8	Т8	PLL/Biax
1x4 (0.75x4)	28 (2 lamps)	54 (2 lamps)	32 (2 lamps)	32 (2 lamps)	
2x2	14 (2 lamps) (24 2 or 4 lamps)	17 (2 or 4 lamps)	17 (2 or 4 lamps	40, 50, 55)(2 or 4 lamps)
1.5x4 2x4	28 (2, 4 or 6 lamps)	54 (2, 4 or 6 lamps)	32 (2, 4 or 6 lamps)	32 (2, 4 or 6 lamps)	

Other options may be available consult factory. Specifications and data subject to change without notice.