

|         |
|---------|
| Project |
| Type    |
| Date    |
| Cat #   |

## Application Features

Specification-grade, recessed, drywall luminaire provides a soft, glare-free, luminous sky-scape with ultra-modern styling and high visual comfort. For use with indoor applications where high-efficiency and visual impact are the primary considerations. This luminaire's spring hooks allow for door frame to easily lift out for re-lamping and conceal lamps with aesthetic reveal.



## Specifications

### Optical System

Standard diffuser is a concave opal acrylic lens. Optional diffuser is flat opal.

### Mounting

Optional mounting brackets for T- Bar Grid ceiling application available.

### Construction

Die-formed, code gauge post-painted steel. Access plate for quick wiring. Knockouts are provided on ends for through wiring. Ballast cover snaps into place eliminating the need for tools when accessing the ballast. Diffuser is held in place with springs.

### Finish

White, polyester powder painted housing.

### Electrical

Rotary lampholders ensure positive lamp retention. Sufficient knockouts are provided for connections and through wiring.

### Approvals

Approved to CSA and UL standards.

## Features

- Opal, acrylic concave lens
- Heavy-duty construction
- Access plate for quick wiring
- Available with 1, 2, 3, 4, 6 or 8 lamps (T5, T8 and PLL/Biax configurations)
- Available in 1x1, 2x2, 3x3 and 4x4 configurations


## Options & Adders

- Dimmable and Emergency ballast
- Radio interference filter (120V - 277V)
- Mounting Brackets - T- Bar Grid Ceiling
- Optional lenses, see product selection
- 20 gauge riveted

## Applications


- Call Centers
- Corridors
- Hotels
- Office Areas
- Recreation Rooms
- Restaurants
- Retail Stores and Supermarkets

## Dimensions

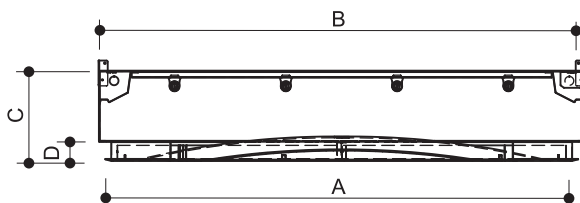

**Side View**

| MODEL | A       | B        | C      | D      |
|-------|---------|----------|--------|--------|
| 1x1   | 10 3/4" | 12"      | 8 7/8" | 1 7/8" |
| 2x2   | 22 3/4" | 24"      |        |        |
| 3x3   | 34 3/4" | 36"      |        |        |
| 4x4   | 46 3/4" | 48 1/16" |        |        |

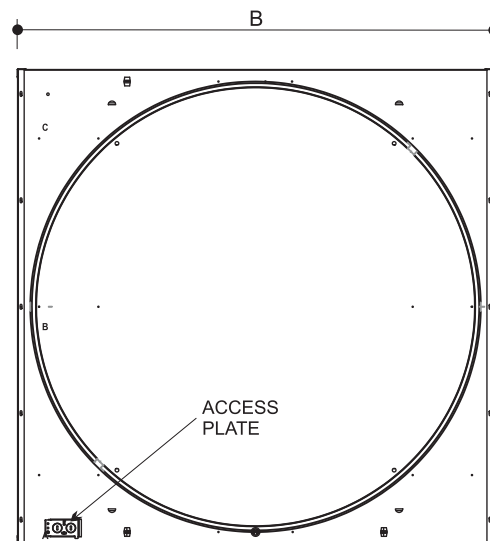

**Back View**

