

Project
Type
Date
Cat #

Application Features

Premium-grade, recessed, lay-in direct/indirect coffered T-Bar troffer with modern styling and high visual comfort. For use with indoor applications where low-glare, high-quality and ease of installation are required. This luminaire's basket-shaped, perforated metal shield provides both direct and indirect light distribution for primary and ambient lighting which makes it ideal for most office environments and corridors.



Specifications

Optical System

Shields are perforated for direct and indirect illumination and contain a translucent opal white acrylic overlay diffuser for visual comfort. Indirect reflectors are precision formed and contoured to provide soft, low-glare, indirect illumination, while maintaining high-efficiency and a wide uniform lighting distribution.

Mounting

Holes provided for chain-mounting support to building structure. This luminaire has been specifically designed for T-Bar applications. Integral earthquake clips.

Construction

Die-formed and riveted, heavy-gauge steel housing assembly. Die-formed, perforated cold rolled steel shielding. Precision-formed steel reflector.

Finish

White polyester powder painted visible surfaces.

Electrical

Rotary lampholders ensure positive lamp retention. Sufficient knockouts are provided for connections and through wiring.

Approvals

Approved to CSA and UL standards.

Features

- Available in 1 x 4, 2 x 2, 2 x 4, 20 x 60, 600x1200 and 500x1500 configurations
- Available with 1, 2 or 3 lamps (T5, T8 and PLL/Biax configurations)
- Translucent, opal white acrylic diffuser overlay
- Single, basket-shaped perforated metal shield



Options & Adders

- Dimmable and Emergency ballast
- Radio interference filter (120V - 277V)
- Drywall flange kits available
- Non-perforated matt white shield
- Air supply slots
- 20 gauge riveted construction
- Flexible metal whip - 6 foot x 3/18 gauge conductors
- Modular wiring system (consult factory)

Applications

- Classrooms
- Corridors
- Office Areas
- Retail Stores and Supermarkets

Dimensions

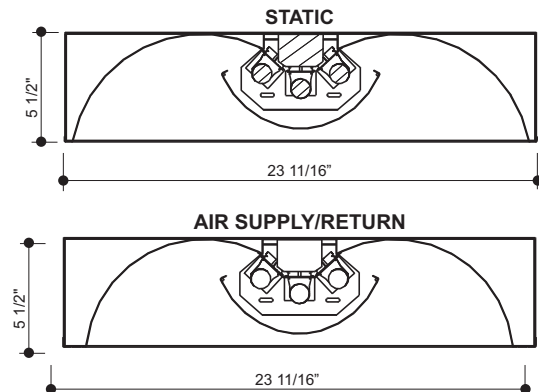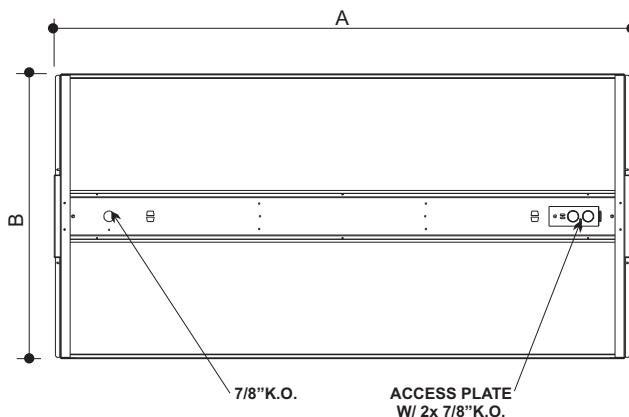

MODEL	NOMINAL LENGTH	A	B
1x4	48"	47 3/4"	11 11/16"
2x2	24"	23 3/4"	23 13/16"
2x4	48"	47 3/4"	23 13/16"
600x1200	1200mm	1194mm	594mm
500x1500	1500mm	1494mm	494mm

USED WITH 3 LAMP T5 OR EMERGENCY BATTERY PACK

