

## Premium-Grade Surface-Mounted Wrap-Around Ceiling Luminaire With Optional Colored Accent Ends

Project
Type
Date
Cat #

### Application Features

Premium-grade, surface-mounted wrap-around ceiling luminaire. This luminaire's co-ordinated end caps integrate flawlessly with other design and lighting components. Regressed housing provides a floating appearance.



### Specifications

#### Optical System

Standard diffuser is soft matt white opal acrylic designed for even and low-glare illumination. Accented translucent end caps are sonically welded and are available in a variety of patterns and colors. Standard finish is white solid. All other finishes are available through special order only.

#### Mounting

Mounting holes are provided within offset to prevent distortion of housing when tightening mounting fasteners. Mounts over electrical junction box. Offset mounting pads which keep luminaire level and slightly off of the mounting surface are formed within the housing.

#### Construction

Die and brake-formed, code gauge steel housing assembly. Inspection knockouts provided on 3/4 x 4 foot units only, for mounting to junction box. Ballast cover snaps into place eliminating the need for tools when accessing the ballast. Diffuser hinges from either side in a lift and shift manner and is self-centered for easy re-lamping and re-ballasting.

#### Finish

Pre-painted, high-reflectance white housing.

#### Electrical

Rotary lampholders ensure positive lamp retention. Sufficient knockouts are provided for connections and through wiring.

#### Approvals

Approved to CSA and UL standards.

### Features

- Shallow design
- Available with 2 or 4 lamps (T5 and T8 configurations)
- Diffuser hinges from either side in a lift and shift manner and is self-centered for easy re-lamping and re-ballasting
- Low-profile color accent linear diffuser with contoured sides and sculpted ends
- Available in 3/4 x 4 and 1-1/2 x 4 dimensions




### Options & Adders

- Dimmable ballast
- Consumer packaging



### Applications

- Bathrooms
- Corridors
- Kitchens
- Recreation Rooms

### Dimensions

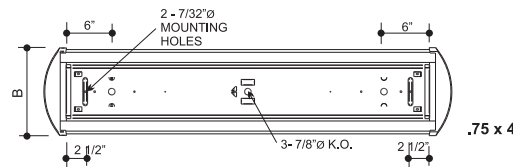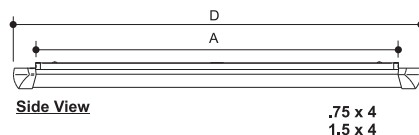

MODEL	Nominal Housing Length A	Overall Diffuser Width B	Housing Width C	Overall Diffuser Length D	Overall Height E
.75 x 4	48"	11 9/16"	6 1/4"	53 7/8"	3 9/16"
1.5 x 4	17"	11 13/16"	4 1/8"		

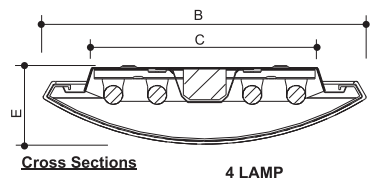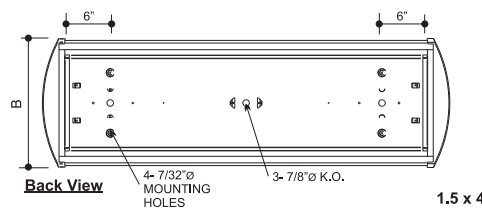


TRI  
Trillium

## Premium-Grade Surface-Mounted Wrap-Around Ceiling Luminaire With Optional Colored Accent Ends



Photometrics - TRI .75X4 2L - T832 - Efficiency 56%

## Candle Distribution



Luminance Summary-CD. / SQ. M.

ANGLE	ALONG	45	ACROSS
45	2452	2153	2133
55	2362	2004	1991
65	2184	1789	1830
75	1809	1534	1686
85	1420	1349	1639

## Candle Power Summary

ZONE	LUMENS	% LAMP	% LUMINAIRE
0 - 30	803.30	13.60	24.40
0 - 40	1327.80	22.50	40.30
0 - 60	2409.10	40.80	73.10
0 - 90	3294.30	55.80	100.00
40 - 90	-	-	-
60 - 90	885.20	15.00	26.90
90 - 180	-	-	-
0 - 180	3294.30	55.80	100.00

## Ordering

TRI

-

-

Options

**Size**  
(Width x Length)

.75x4  
1.5x4

**No. of Lamps**

2L  
4L

**Lamp Watts**

See table below

**Lamp Type**

T5  
T5HO  
T8

**Voltage**

120 - 120V  
347 - 347V  
UNV - 120-277V  
UN4 - 347-480V

**Ballast Type**

N - Instant Start  
P - Program Start  
R - Rapid Start

**Ballast Options**  
*(See Option Code Section For More Information)*

☐  
☐  
☐  
☐  
☐  
☐  
☐

B02 Dimming Addressable Digital (dali)  
B03 Dimming Low Voltage (0-10v)  
B04 Dimming Line Voltage  
B08 Ballast - High Ballast Factor  
B09 Ballast - Low Ballast Factor  
B33 Emergency Lighting Battery Pack 1-lamp  
B34 Emergency Lighting Battery Pack 2-lamp

**Packaging Options**

☐  
☐

K0 Pack Bulk/ Pallet Packed and/or Wrapped  
K11 Pack Consumer

**End Cap Finish Options (select one only)**  
*(white solid is standard)*

☐  
☐  
☐  
☐

E01 Alabaster  
E03 Black Marble  
E05 Ivory Marble  
E10 White

**Approval and Rating Options**

☐

X7 Dual CSA and USA Market

**Example:**

TRI.1.5x42L-T832PUNV-E10

**Lamp Watts**

Size	Nom. Lamp Watts		
	T5	T5HO	T8
.75x4	28	54	32
1.5x4	28	54	32

Other options may be available consult factory.  
Specifications and data subject to change without notice.