

UCOM Universal Commercial

Residential-Grade Combination Fluorescent Strip Luminaire

Project	
Туре	
Date	
Cat #	

Application Features

Residential-grade, combination side-mounted or bottom-mounted fluorescent strip luminaire. For use with indoor applications where flexible lamp mounting and ease of conversion are desired. This luminaire allows a customer to maintain fewer SKUs by providing multiple lamp mounting configurations.



Specifications

Mounting

Mounting holes are provided.

Construction

Die and brake-formed, code gauge, pre-painted white steel. Snap-in end caps may be butted together for continuous row-mounting.

Finish

Pre-painted, high-reflectance white housing.

Electrical

Rotary lampholders ensure positive lamp retention. Sufficient knockouts are provided for connections and through wiring.

Approvals

Approved to CSA and UL standards.

Features

- Low-profile housing
- Available with 1, 2 or 3 lamps (T8 configurations)
- Available in lengths from 18 to 48 inches
- · Continuous row-mounting capability
- Easily configurable for side or bottommounting of lamps
- Snap-together design
- Single-sided or double-sided units available
- Available in T8 configurations

MODEL

2 LAMP

218

224

236

248

3 LAMP

318

324

336

348

LENGTH

A (in.)

18

24

36

48


Options & Adders

Dimmable ballastConsumer packaging

Applications


- Coves
- Display Cabinets
- Task Lighting
- Under Cabinets
- Valances

Dimensions

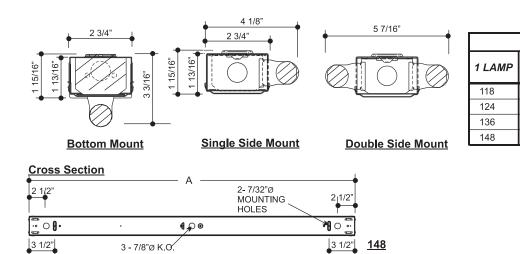

Project	UCOM Universal Commercial	
Туре	Residential-Grade Combination Fluorescent Strip Luminaire	
Date		
Cat #		

Photometrics - Please consult www.viscor.com for photometric results.

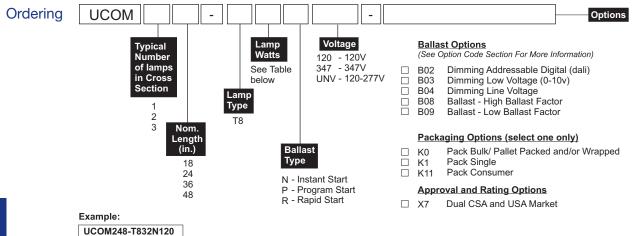

Lamp Watts

	Nominal Lamp Watts		
Length	Т8		
18 24 36 48	15 17 25 32		

Other options may be available consult factory. Specifications and data subject to change without notice.