

Project
Type
Date
Cat #

Application Features

Premium-grade, surface-mounted wrap-around valance luminaire. For use with indoor applications where contemporary styling and energy-efficiency are primary considerations. Regressed housing provides a floating appearance.



Specifications

Optical System

Standard diffuser is soft matt white opal acrylic designed for even and low-glare illumination.

Mounting

Mounting holes are provided within offset to prevent distortion of housing when tightening mounting fasteners. Offset mounting pads which keep luminaire level and slightly off of the mounting surface are formed within the housing. Mounts over electrical junction box.

Construction

Die and brake-formed, code gauge steel housing assembly. Ballast cover snaps into place eliminating the need for tools when accessing the ballast. Diffuser is fastened in place on both ends.

Finish

Pre-painted, high-reflectance white housing.

Electrical

Rotary lampholders ensure positive lamp retention. Sufficient knockouts are provided for connections and through wiring.

Approvals

Approved to CSA and UL standards.

Features

- Available in 2, 3 and 4 foot lengths
- Available with 1 or 2 lamps (T5 and T8 configurations)
- White opal acrylic wrap-around diffuser
- Contoured sides provide a cloud-like floating profile
- Easy re-lamping and re-ballasting


Options & Adders

- Dimmable and Emergency ballast
- Consumer packaging

Applications

- Corridors
- Fitting Rooms
- Locker Rooms
- Stairwells
- Utility Areas
- Vanities

Dimensions

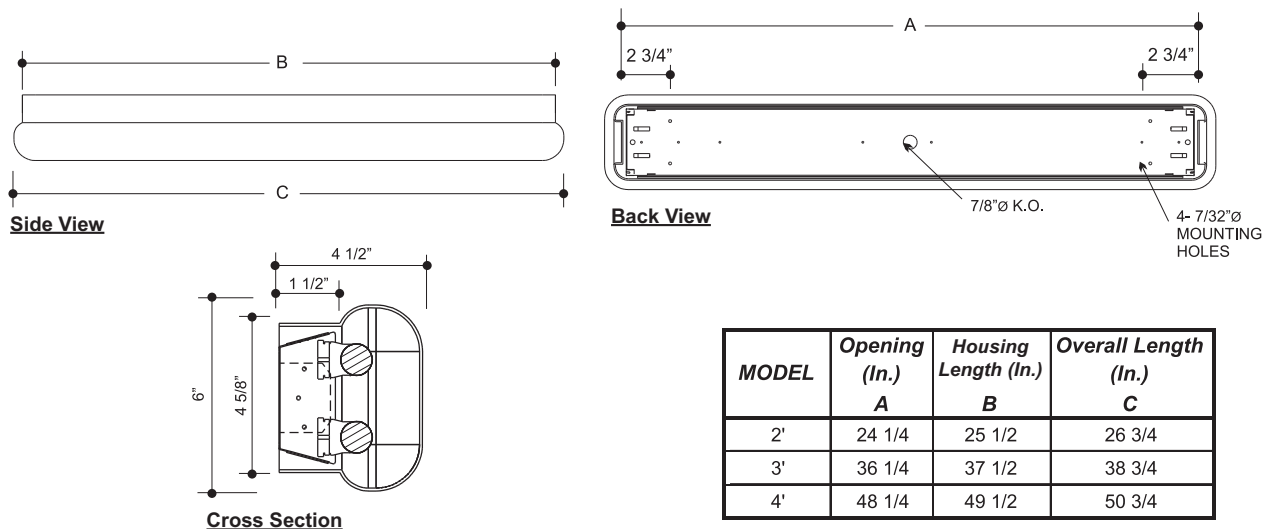


WPRE
Wall Prestige

Premium-Grade Surface-Mounted Wrap-Around Wall Valance Luminaire



Photometrics - Please consult www.viscor.com for photometric results.

Candle Distribution

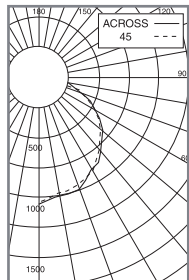


Luminance Summary-CD. / SQ. M.

ANGLE	ALONG	45	ACROSS
45	1964	1823	1904
55	1355	1298	1554
65	1027	982	1432
75	1014	899	1534
85	985	794	1790

Candle Power Summary

ZONE	LUMENS	% LAMP	% LUMINAIRE
0 - 30	1241.30	21.00	31.00
0 - 40	2017.30	34.20	50.30
0 - 60	3206.80	54.40	80.00
0 - 90	4007.80	67.90	100.00
40 - 90	-	-	-
60 - 90	801.00	13.60	20.00
90 - 180	-	-	-
0 - 180	4007.80	67.90	100.00

Ordering

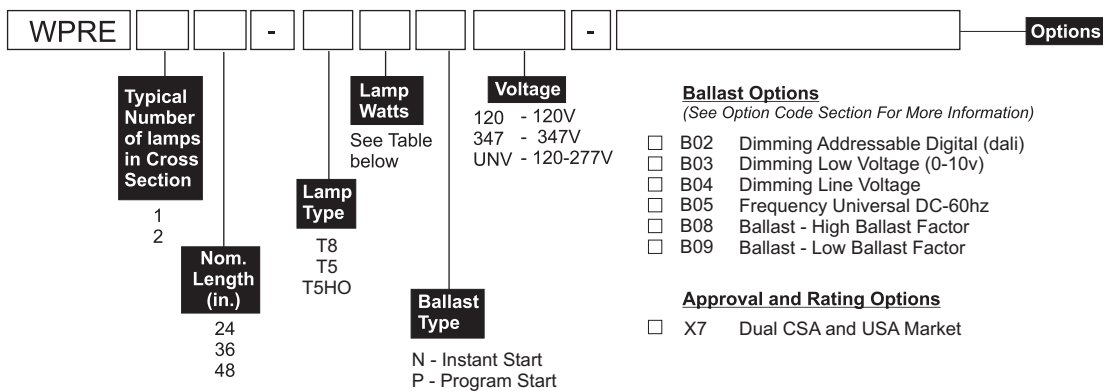

Example:

WPRE248-T832PUNV-B01

Lamp Watts

Length	Nominal Lamp Watts T8	T5	T5HO
24	17	14	24
36	25	21	39
48	32	28	54

*Other options may be available consult factory.
Specifications and data subject to change without notice.*