

ONCURVE-CONCAVE

LED - Architectural Recessed Troffer with Concave Lens and Center Spine

Project:	Catalogue:	Type:
Notes:		

Product Description

Premium-grade, recessed, lay-in T-Bar troffer with modern styling and high visual comfort featuring a single concave lens and narrow center spine for architectural appeal. For use with indoor applications where high-efficiency, high performance and ease of installation are required.

Applications

Office Areas, Education, Retail Stores, Classrooms, Hospitals, Nursing Homes, Hospitality



Features

- Narrow architectural center spine
- 1x4, 2x2, 2x4 and 20x60 configurations
- Standard low voltage dimming (0-10v, 1%)
- For use in insulated ceilings
- UGR as low as 15

Featured Options

- Emergency lighting battery pack
- Intellect occupancy/daylight sensor

Optical System

Frosted curved single-piece diffuser.

Mounting

This luminaire has been specifically designed for T-Bar applications. Integral earthquake clips.

Construction

Die-formed, cold rolled heavy-gauge steel housing assembly. Wiring access plates and knockouts are provided on back of housing.

Finish

White, polyester powder painted housing.

Electrical

Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver L80 performance > 60,000 hours. Standard low voltage dimming (0-10v) driver.

Warranty

5 year limited warranty. For complete warranty, click here:




Approvals

- ETL listed.
- Suitable for damp locations.
- DesignLights Consortium®

All configurations may not be DLC qualified. Check www.designlights.org/QPL for qualified configurations.



Dimensions

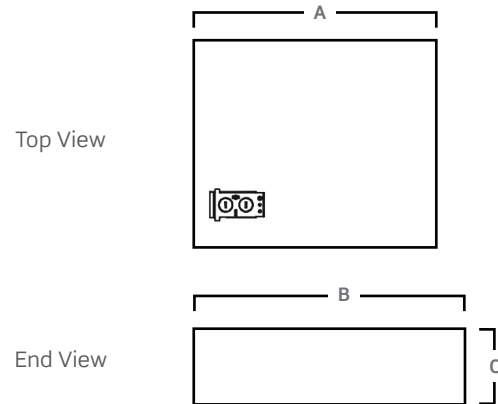

Size	A	B	C
1x4	47.75"	11.75"	4.5"
2x2	23.75"	23.75"	4.5"
2x4	47.75"	23.75"	4.5"
20x60	59.75"	19.75"	4.5"

Consult installation guide for exact dimensions.


ONCURVE-CONCAVE

LED - Architectural Recessed Troffer with Concave Lens and Center Spine

Project:	Catalogue:	Type:
Notes:		

Order Key

EXAMPLE: OCRV2x2-LED840K040LUNV-C108

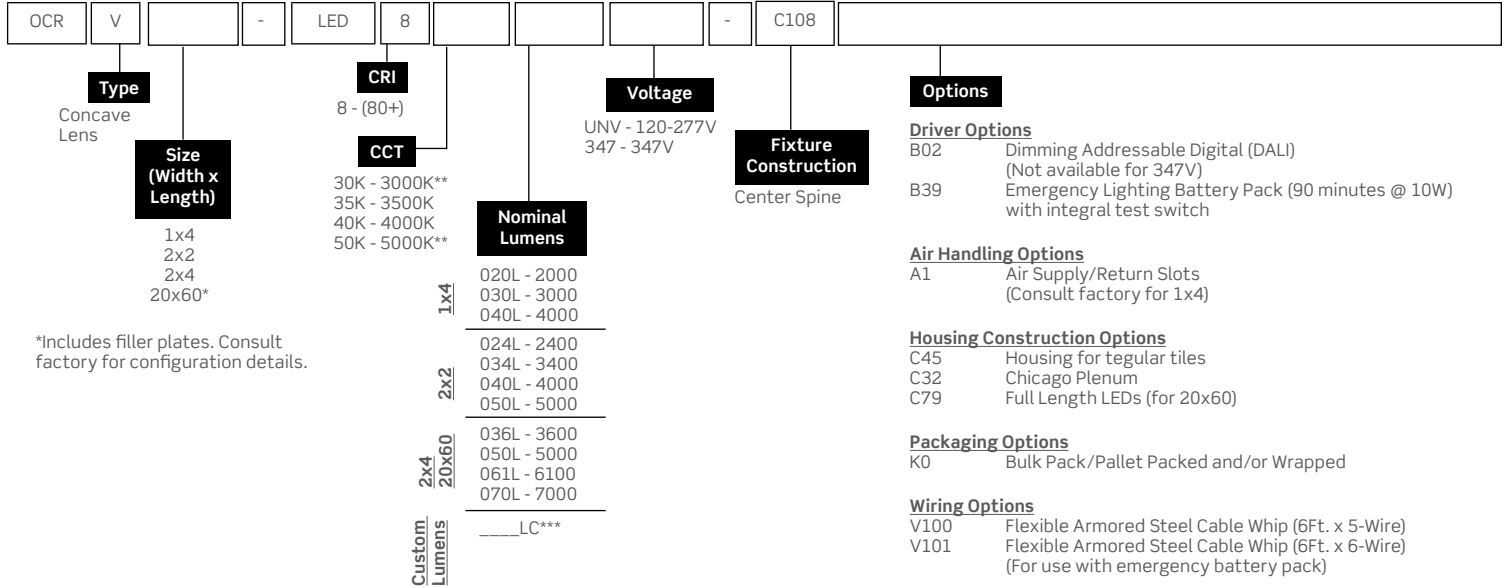

*Includes filler plates. Consult factory for configuration details.

Controls Options
For advanced wireless controls [Click Here](#).

*Includes filler plates. Consult factory for configuration details.
** Consult factory for availability

Other options may be available, consult factory. Specifications and data subject to change without notice.

Performance Data

LED Performance Data				
Size	Nominal Lumens	Delivered Lumens	Watts	Lumens Per Watt
1x4	2000	1974	17	119
	3000	3116	26	120
	4000	4062	36	113
2x2	2400	2361	19	124
	3400	3400	29	119
	4000	4000	34	117
	5000	4989	43	116
2x4 20x60	3600	3727	27	139
	5000	5000	38	132
	6100	6100	48	128
	7000	7059	56	126

Values based on 840K with standard lens at 25C

*Custom Lumens		
Size	Nominal Lumens Range	Watts
1x4	2000 - 4000	17 - 36
2x2	2400 - 5000	20 - 45
2x4	3600 - 7000	28 - 55

*3000Lm Example:
OCRV2x2-LED840K030LCUNV-C108

Flange Kits (Ordered Separately)	
Size (Width x Length)	Item No.
1x4	KIT00136
2x2	KIT00137
2x4	KIT00138

Surface Kits (Ordered Separately)	
Size (Width x Length)	Item No.
1x4	KIT00373
2x2	KIT00374
2x4	KIT00375

Performance Scaling Factor

	50K	40K	35K	30K
80CRI	1.000	1.000	0.960	0.946
90CRI	0.875	0.875	0.836	0.809

Lifetime Expectancy

	Calculated Hours	Reported Hours
L70	≥ 238,000	> 60,000
L80	≥ 149,000	> 60,000
L90	≥ 71,000	> 60,000