# **FK - Flange Kit**

Recessed Drywall Flange Kit



Project:	Catalogue #:	Туре:
Notes:		

# **Product Description**

Specification-grade flange kit can quickly and easily convert the most common T-Bar luminaires into a drywall-flanged luminaire.

# **Applications**

Office Areas, Recreation Rooms, Retail Stores and Supermarkets

#### **Features**

- Available in 1x4, 2x2 and 2x4 configurations
- Adjustable for drywall, plaster and similar type ceilings up to 1 inch thick
- Economical
- Heavy-duty construction
- Requires only three inch clearance over fixture depth
- Universal fits most manufacturer's T-Bar luminaires

# **Options & Adders**

• Consult factory for other finishes

#### Mounting

Steel brackets with vertical adjustability are provided to tension-mount side flanges against ceiling opening. Holes provided for chain-mounting support to building structure. End flanges are pressure fit and are removable to permit for rowmounting. Requires only 3" clearance over fixture depth i.e. a 4" deep fixture equires only 7" cavity depth (in more shallow cavity applications, fixture may be inserted prior to installation of flange kit).


### Construction


Die and brake-formed, heavy-gauge steel.

#### Finish

White, polyester powder painted visible surfaces.


#### **Order Key**




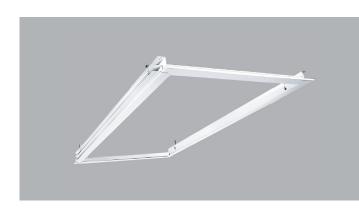

#### **Dimensions**

(UNIVERSAL) FLANGE KIT







Nominal Dimension	Ceiling Opening		Overall Flange	
	A (Width)	B (Length)	C (Width)	D (Length)
1x4	12 3/4"	48 1/2"	14 1/8"	49 15/16"
2x2	24 3/4"	24 1/2"	26 1/8"	25 15/16"
2x4	23 3/4"	48 1/2"	26 1/8"	49 15/16"