

LMEZ 2 - INVERTED-V LENS

LED - Suspended Linear Direct Luminaire with Inverted V Notched Housing

Project:	Catalogue #:	Type:
Notes:		

Product Description

Premium-grade linear LED luminaire featuring unique inverted V notched end-caps with a formed lens to compliment the inverted angle. This sleek and cohesive design is intended for use in indoor applications where direct linear lighting is desired. The LMEZ 2 is suitable for individual suspended applications and offers visual comfort for indoor new-construction architectural and retail settings.

Applications

Classrooms, Libraries, Office Areas, Retail Stores



Features

- 2" width
- Inverted V notched end-caps
- Precision-formed frosted diffuser
- Standard low voltage dimming (0-10v) 1%
- Stand-alone configurations

Featured Options

- Available in 24", 48" 72" and 96" lengths
- Lumen Output up to 1000 Lumens/FT
- Tunable white (2700 - 6500K)
- Emergency lighting battery pack
- 80+ and 90+ CRI

Optical System

Precision-formed lay-in frosted diffuser with inverted V bend offers high levels of efficiency and visual comfort.

Mounting

Various adjustable aircraft cable kits available. (Sold separately, see page 2).

Construction

Die-formed and spot-welded, code gauge steel housing assembly.

Finish

White polyester powder painted housing standard. Other finishes available (see ordering key).

Electrical


Long life LED's coupled with high efficiency drivers provide quality illumination. Rated to deliver L80 performance >60,000 hours.

Warranty



5 year limited warranty. For complete warranty, click here: 

Approvals

- ETL Listed.
- Suitable for Damp Location

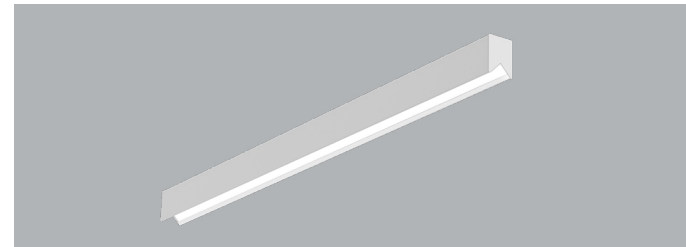

Dimensions

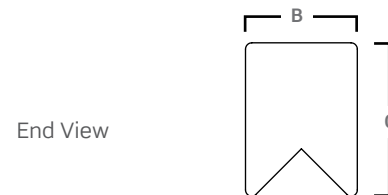

Size	A	B	C
24	22 1/4"	2"	2.78"
48	44 1/4"		
72	66 3/8"		
96	88 1/2"		

View page 2 for mounting option dimensions. Consult installation guide for exact dimensions.


LMEZ 2 - INVERTED-V LENS

LED - Suspended Linear Direct Luminaire with Inverted V Notched Housing

Project:	Catalogue #:	Type:
Notes:		

Order Key

EXAMPLE: LMEZ2-P48-LED835K0410LFUNV-C91L42

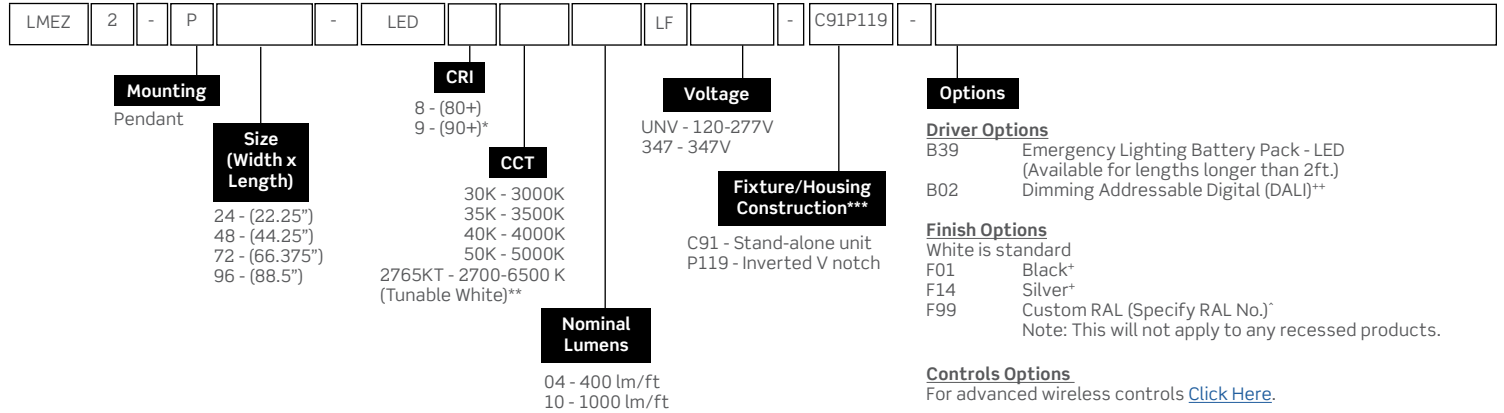

*90+ CRI reduces lumen output by 20% Consult factory for lead times and availability.

** When Selecting 2765KT, if a tunable white-compatible control is not selected the luminaire will come standards with two sets of 0-10V wires for dimming and color tuning (see tunable white diagram for details). For compatible control options please consult factory.

***Power feeds, canopies & air craft cables must be ordered separately. See "How to order" section for details.

**Consult factory for availability and lead times.

*Black (F01) reduces lumen output by 40%. Silver Gray (F14) reduces lumen output by 20%. Consult factory for higher lumen options. Black Acrylic Bottom Lens (P114) reduces lumen output by 75%.

^ Minimum order quantity may apply. Consult factory

Other options may be available, consult factory. Specifications and data subject to change without notice.

Performance Data

Size	Nominal lm per Foot Down	Total Delivered lm Down	Total Watts	lm/W
24"	400	819	8.8	93
	1000	2033	23.4	87
48"	400	1637	17.6	93
	1000	4067	46.8	87
72"	400	2456	26.5	93
	1000	6100	70.2	87
96"	400	3274	35.3	93
	1000	8133	93.6	87

Values based on 840K with standard lens at 25C

Performance Scaling Factor

	50K	40K	35K	30K
80CRI	1.000	1.000	0.960	0.946
90CRI	0.875	0.875	0.836	0.809

Lifetime Expectancy






	Calculated Hours	Reported Hours
L70	≥238,000	>60,000
L80	≥149,000	>60,000
L90	≥71,000	>60,000

LMEZ 2 - INVERTED-V LENS

LED - Suspended Linear Direct Luminaire with Inverted V Notched Housing

Project:	Catalogue #:	Type:
Notes:		

Suspension & Power Kits

Part#		Description
KIT00292 (White) KIT00237 (Black)		48" Aircraft Cable & Canopy
KIT00293 (White) KIT00238 (Black)		5-Wire 18ga UNV Power Supply with 48" Aircraft Cable & Canopy
KIT00230 (White) KIT00253 (Black)†		6-Wire UNV Power Feed with 48" Air Craft Cable & Canopy (Emergency)
KIT00294 (White)		3-Wire 347V Power Feed with 48" Air Craft Cable & Canopy (Non-dimmable)
KIT00295 (White)		5-Wire 347V Power Feed with 48" Air Craft Cable & Canopy

For other suspension kit lengths, please consult factory.
Emergency suspension kit required for each fixture containing emergency battery pack.

Tunable White

When Selecting 2765KT, if a tunable white-compatible control is not selected the luminaire will come standard with two sets of 0-10V wires for dimming and color tuning. For compatible control options please consult factory.

Dim and CCT control wire colors are subject to change without notice. All control wires are marked per the parentheses.

