

LMEZ 3 SQUARE - INVERTED V

LED - Suspended Linear Direct Luminaire with Inverted V Notched Housing

Project:	Catalogue:	Type:
Notes:		

Product Description

The LMEZ3 Square is a premium-grade luminaire features unique inverted V notched end-caps with a formed lens to compliment the inverted angle. This sleek and cohesive design is intended for use in indoor applications where direct linear lighting is desired. The LMEZ3 Square with inverted V housing offers simple elegance, uniform illumination, and visual comfort for office, retail, grocery, education, aisle, hospitality applications, and more.

Applications

Classrooms, Libraries, Office Areas, Retail Stores and Supermarkets

Features

- 3" width
- Inverted V notched end-caps
- Precision-formed frosted diffuser
- Standard low voltage dimming (0-10v) 1%
- Stand-alone configurations
- Suitable for damp location

Featured Options

- Available in 24", 48" 72" and 96" lengths
- Lumen Output up to 1000 Lumens per Foot
- Tunable white (2700 - 6500K)
- Emergency lighting battery pack
- 80+ and 90+ CRI

Optical System

Standard lay-in frosted diffuser offers high levels of efficiency and visual comfort.

Mounting

Various adjustable aircraft cable kits available. (Sold separately, see page 2).

Construction

Die-formed and spot-welded, code gauge steel housing assembly.

Finish

Standard matte white, polyester powder painted housing. Consult order key for other finish options).

Electrical

Long life LED's coupled with high efficiency drivers provide quality illumination. Rated to deliver L80 performance >60,000 hours.

Warranty

5 year limited warranty. For complete warranty, click here:





Approvals

- ETL Listed.
- Suitable for Damp Location



Dimensions

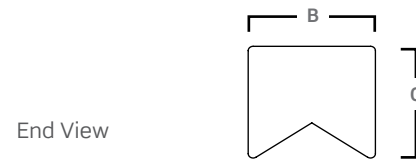

Size	A	B	C
24	22 1/4"	3"	3"
48	44 3/8"		
72	66 1/2"		
96	88 5/8"		

View page 2 for mounting option dimensions. Consult installation guide for exact dimensions.


LMEZ 3 SQUARE - INVERTED V

LED - Suspended Linear Direct Luminaire with Inverted V Notched Housing

Project:	Catalogue:	Type:
Notes:		

Order Key

EXAMPLE: LMEZ3-P48-LED835K04LFUNV-L42

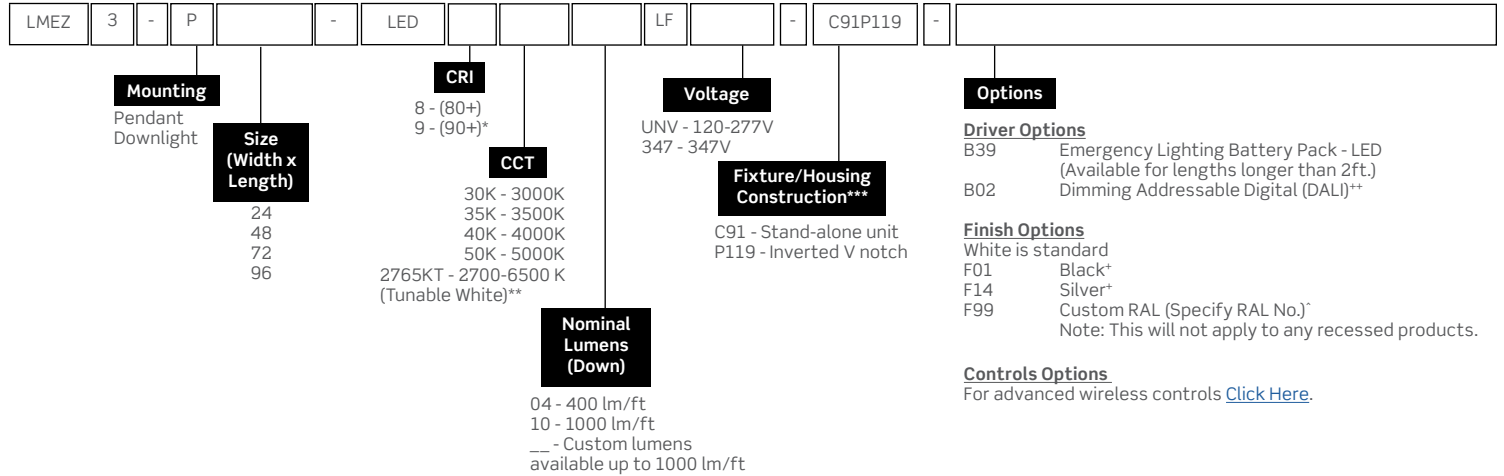

*90+ CRI reduces lumen output by 20%, Consult factory for lead times and availability.

** When Selecting 2765KT, if a tunable white-compatible control is not selected the luminaire will come standards with two sets of 0-10V wires for dimming and color tuning (see tunable white diagram for details). For compatible control options please consult factory.

***For all stand-alone and configurable units, power feeds, canopies & air craft cables must be ordered separately. See "How to order" section for details.

**Consult factory for availability and lead times.

*Black (F01) reduces lumen output by 40%. Silver Gray (F14) reduces lumen output by 20%. Consult factory for higher lumen options. Black Acrylic Bottom Lens (P114) reduces lumen output by 75%.

^Minimum order quantity may apply. Consult factory.

Other options may be available, consult factory. Specifications and data subject to change without notice.

Performance Data

Size	Nominal Lumens	Delivered Lumens	Watts	Lumens per Watt
24"	400	847	7.3	116
	1000	2063	18.8	110
48"	400	1611	13.9	116
	1000	4127	37.7	109
72"	400	2458	21.3	115
	1000	6010	54.7	110
96"	400	3222	27.8	116
	1000	8254	75.4	109

Values based on 840K with standard lens at 25C

Performance Scaling Factor

	50K	40K	35K	30K
80CRI	1.000	1.000	0.960	0.946
90CRI	0.875	0.875	0.836	0.809

Lifetime Expectancy






	Calculated Hours	Reported Hours
L70	≥ 238,000	> 60,000
L80	≥ 149,000	> 60,000
L90	≥ 71,000	> 60,000

LMEZ 3 SQUARE - INVERTED V

LED - Suspended Linear Direct Luminaire with Inverted V Notched Housing

Project:	Catalogue:	Type:
Notes:		

Suspension & Power Kits

Part#	Description
KIT00292 (White) KIT00237 (Black)	 48" Aircraft Cable & Canopy
KIT00293 (White) KIT00238 (Black)	 5-Wire 18ga UNV Power Supply with 48" Aircraft Cable & Canopy
KIT00230 (White) KIT00253 (Black) [†]	 6-Wire UNV Power Feed with 48" Air Craft Cable & Canopy (Emergency)
KIT00294 (White)	 3-Wire 347V Power Feed with 48" Air Craft Cable & Canopy (Non-dimmable)
KIT00295 (White)	 5-Wire 347V Power Feed with 48" Air Craft Cable & Canopy

For other suspension kit lengths, please consult factory.
Emergency suspension kit required for each fixture containing emergency battery pack.

Tunable White

When Selecting 2765KT, if a tunable white-compatible control is not selected the luminaire will come standard with two sets of 0-10V wires for dimming and color tuning. For compatible control options please consult factory.

Dim and CCT control wire colors are subject to change without notice. All control wires are marked per the parentheses.

