

### NOTES

- Installation should be completed by an individual familiar with the construction and operation of the luminaire.
- Installation of luminaire must be in accordance with national and local building and electrical codes.
- Carefully read and follow all warnings and instructions before installing or servicing the luminaire.
- Instructions do not cover all details and all possible product configurations
- Do not restrict luminaire ventilation.
- Ensure LED/Fluorescent luminaire is not covered with material that will prevent convection or conduction cooling.
- Do not exceed luminaire's maximum ambient temperature.
- Ensure LED/Fluorescent luminaire has the correct polarity before installation.

### WARNINGS

#### Electric shock:

- Disconnect or turn off power before installing or servicing luminaire.
- All electrical wiring to be completed by a qualified licensed electrician in accordance with local and National/Canadian Electrical Code.
- Ensure supply voltage corresponds with the correct ballast/driver voltage.
- Avoid exposing wiring to metal edges and sharp objects.
- Ensure that the luminaire is properly grounded to prevent electric hazards.

#### Fire:

- Keep flammable and combustible materials away from the light source and/or lens.
- Use correctly rated supply conductors as indicated by product labeling.

#### Burn:

- Allow luminaire and lamps to cool before handling luminaire.
- Follow all warnings, restrictions and recommendations given by the lamp manufacturers.

#### Personal Injury:

- Wear safety glasses and gloves when handling the luminaire to avoid physical injury.
- Avoid direct eye contact with light source.
- Always support the weight of the luminaire.




Viscor Inc. is not responsible for any injuries due to the improper installation or handling of its products.

### KIT00005

SINGLE STEM MOUNT BOX TYPE  
(1/2" OR 3/4" PIPE).M49

### NOTE:

Not for use with Vapor-Tight Housings.

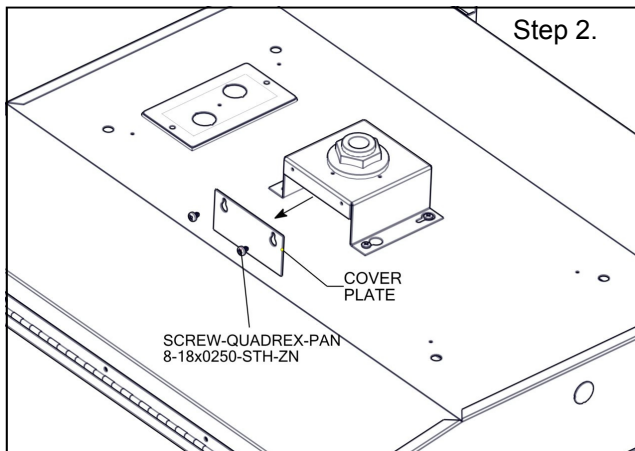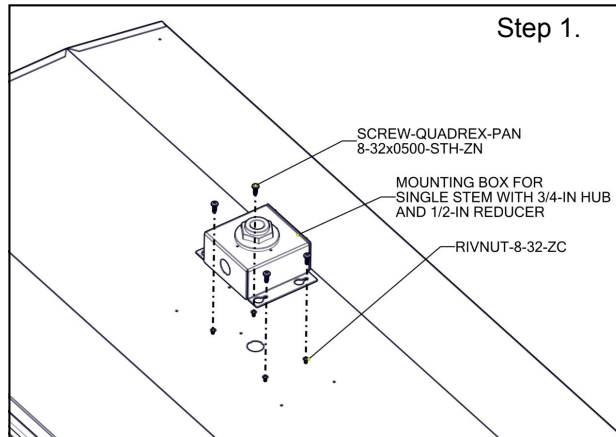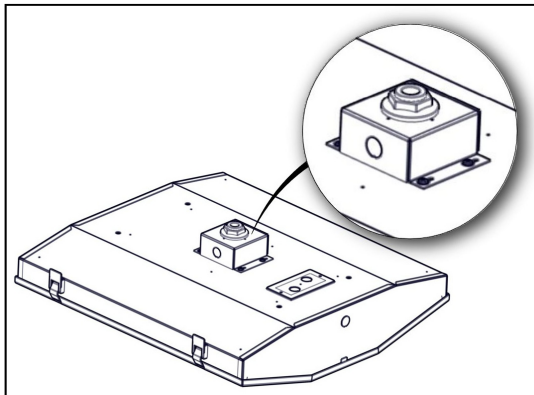

1. Carefully remove box kit from packaging.
2. Place mounting box at the center directly in line with the integral rivnuts #8-32 and fasten #8-32 screws provided to secure box.
3. Slide out cover plate.
4. Connect ground wire from electrical supply to the ground wire on the luminaire. If no luminaire ground wire is present, attach the electrical supply ground wire directly to the ground screw located on the luminaire.
5. Connect electrical supply wires to the corresponding wires from the luminaire.
6. Place the cover plate back onto the box and secure into place.
7. Proceed to install stem (by others).